

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>5</sup> : <b>G01J 3/02</b>	<b>A1</b>	(11) International Publication Number: <b>WO 94/11714</b> (43) International Publication Date: <b>26 May 1994 (26.05.94)</b>
(21) International Application Number: <b>PCT/US93/10564</b> (22) International Filing Date: <b>8 November 1993 (08.11.93)</b> (30) Priority data: <b>07/973,956</b> <b>9 November 1992 (09.11.92)</b> <b>US</b> (60) Parent Application or Grant (63) Related by Continuation <b>US</b> <b>07/973,956 (CON)</b> <b>Filed on</b> <b>9 November 1993 (09.11.93)</b> (71) Applicant (for all designated States except US): <b>AKZO NOBEL N.V. [NL/NL]; Velperweg 76, P.O. Box 186, NL-6800 LS Arnhem (NL).</b>		(72) Inventor; and (75) Inventor/Applicant (for US only) : <b>HAUGEN, Douglas, G. [US/US]; 1407 Logan Street, Durham, NC 27704 (US).</b> (74) Agent: <b>BOBROWICZ, Donna; Organon Teknika Corporation, 1330-A Piccard Drive, Rockville, MD 20850 (US).</b> (81) Designated States: <b>AU, CA, FI, JP, KR, NZ, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</b>  <b>Published</b> <b>With international search report.</b>

(54) Title: **MULTIPLE DISCRETE ANALYZER TEST APPARATUS AND METHOD**

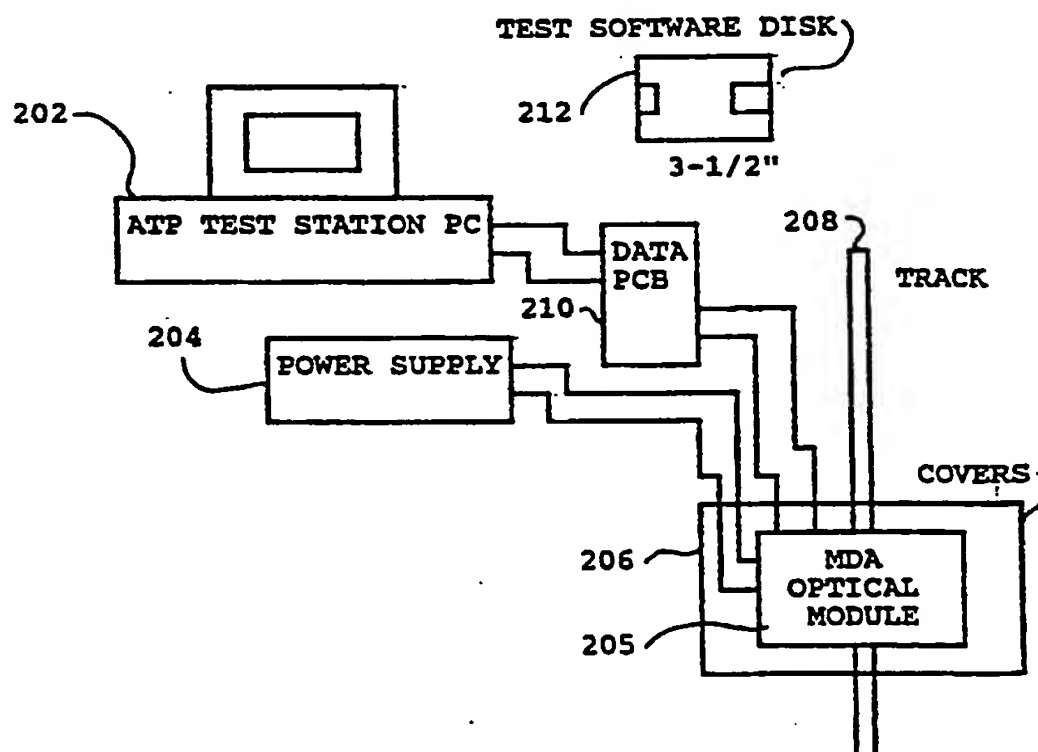

(57) Abstract

A computer based system for testing an optical monitoring system includes a program (212) having program instructions and optical monitoring system parameters, for implementing a plurality of tests of an optical monitoring system. A computer (202) includes at least one processor for executing the program instructions, storage components for storing program instructions and test data, including the optical system parameters, a user input for inputting commands, and a display for displaying a menu of available test commands, test results and other data. An interface (210) is provided for interfacing the optical monitoring system to the computer for exchange of control and data signals. A fixture (208) is provided for mounting the optical monitoring system during testing.

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TC	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## MULTIPLE DISCRETE ANALYZER TEST APPARATUS AND METHOD

BACKGROUND OF THE INVENTION1. Field of the Invention

The invention relates to the field of automating  
5 testing of complex equipment including electrical and  
optical components, and in particular to an apparatus and  
method for testing a multiple discrete analyzer (MDA)  
optical module.

2. Background Information

10 A multiple discrete analyzer, referred to hereafter as  
an MDA, is a complex machine for automatically performing  
multiple coagulation related diagnostic tests on human  
blood. An example of such a machine is described in U.S.  
Patent No. 5,002,392, assigned to the assignee of the  
15 present application, hereby incorporated by reference.

Briefly, the MDA includes a multi-channel optical  
monitoring system for monitoring the spectral transmission  
of a plurality of blood samples. A plurality of light beams  
are generated and a plurality of optical monitoring stations  
20 (positions) are arranged along a pathway. Each station has  
an optical path formed by one of the light beams transverse  
to the pathway. The optical characteristics are monitored  
along the optical path at each station. A drive mechanism  
moves a plurality of reaction wells, each containing a  
25 reaction volume (blood sample), along the pathway from  
station to station. The respective reaction volumes dwell  
periodically at each station in each respective optical path  
transmitting a respective one of the light beams. A  
diffraction grating is provided for diffracting the beams  
30 transmitted by respective ones of the reaction volumes. The  
diffracted beams are focussed and at least one array of  
photodetectors is positioned for receiving the diffracted  
and focussed beams for producing electrical signals  
representing the spectral content of the diffracted beams.

An electronic circuit detects the electrical signals of the array which may be stored for further processing and evaluation.

The multi-channel optical monitoring system includes a plurality of photodiode arrays illuminated by light beams projected onto the arrays by way of a shutter mechanism. Each of the light beams constitutes an optical channel and passes through a reaction well of a cuvette and then through a transmitting diffraction grating for the purpose of performing an optical analysis of a reaction volume, the blood sample, in the reaction well. The photodiode arrays each develop electrical signals corresponding to the spectral distribution of the respective beams falling on the arrays, and the arrays are periodically read by electronic scanning circuitry.

The disclosed shutter mechanism comprises a rotating shutter which includes a number of cam elements mounted on a motor driven shaft. The light beams are incident on the cams in a direction parallel to the rotational planes of the cams. Each cam element is aligned in a respective one of the optical channels and has a cut-out segment greater than 180° so that each cam will block the light beam that it is aligned with for a certain portion of the rotation and will pass the beam for a remaining portion of the rotation. The cut-out segments of the cams are angularly arranged relative to one another so that the rotating shutter sequentially passes the beams in a predetermined sequence.

Each cam thus constitutes a shutter element which opens and closes an optical path during each revolution. Actually, each revolution of a cam may be divided into four periods. A first period occurs during a portion of a turn when the cam completely blocks the optical path of the light beam. A second period occurs when an edge of the cam bordering on the cut-out segment passes through the optical path of the beam during which the optical beam is partially transmitted onto the photodiode array. This is the opening transition. A third period occurs at the conclusion of the

opening transition when the cut-out segment of the cam is positioned so that the optical path of the beam is uninterrupted by the cam and therefore the entire beam is fully projected onto the photodiode array. The fourth  
5 period is the closing transition period when the other edge of the cut-out segment passes through the optical path of the beam so that the optical beam is again only partially transmitted onto the photodiode array. At the conclusion of the closing transition period the optical beam is totally  
10 blocked so that the optical channel enters into a dark period (the first period described above) until the next opening transition period.

The electronic scanning circuitry disclosed in U.S. Patent No. 5,002,392 involves a charge storage mode of  
15 operation whereby each photodiode element integrates light projected thereon by virtue of an electron depletion of its p-n junction which is replenished at the time of scanning. The amount of charge required to replenish the electron depletion is a measure of the integrated light. The charge  
20 coupled mode of operation for electronically scanning a photodiode array is well known as disclosed in U.S. Patent No. 5,002,392 and the prior art cited therein.

The charge storage mode of operation for scanning the photodiode arrays is desirable in an environment in which  
25 there are hundreds of low level optical signals that must be evaluated at high speeds and is economical in terms of cost and space since only a single charge coupled amplifier is required in lieu of a separate amplifier for each photodiode element.

30 Electronic control, interfacing and processing circuitry is associated with the above optical module components. The circuitry includes shutter rotation control circuitry, filter selection control circuitry, photodetector scanning and control circuitry, photodetector signal  
35 amplification circuitry, digital to analog and analog to digital convertor devices and other interface circuitry.

The above optical, electronic, and optoelectrical elements comprise the optical module of the MDA. The optical module is the critical element of the MDA and proper operation of the MDA is dependent on proper alignment and operation of the optical module. In the past, testing and alignment of the completed optical module has represented an insurmountable task given the large number of variables affecting its operation. Tests and adjustments had to be made during assembly of each portion of the module, resulting in increased manufacturing time and costs.

Testing and alignment of the completed optical module should ideally include testing and adjusting the sensing and control electronics, testing for light leakage, wavelength registration and testing, optical uniformity stability and alignment, and filter testing.

A need has, therefore, existed for an efficient, accurate and automatic way to test the completed MDA optical module as it leaves the manufacturer, arrives at a test facility and is installed in an MDA device.

20

#### SUMMARY OF THE INVENTION

It is an object of the present invention to provide an apparatus and method for testing the optical module of an MDA device, in particular, for performing alignment and diagnostic tests of the optical module.

25

According to one embodiment of the invention, an automated acceptance test procedure includes alignment, diagnostic and qualification tests. The alignment and diagnostic tests include displaying of all the elements of any of the arrays for a respective optical monitoring station, displaying of any single element of the arrays for all stations, and wavelength registration. Qualification testing provides traceability through the module's serial number stamped on the module and stored in a disk file.

30

Other test features include electrical systems tests, optical dark tests, wavelength tests, optical signal tests, and filter testing.

35

In addition to the above, mechanical compatibility of the optical module with a test fixture may be confirmed as a prerequisite to performing any of the automated tests. It is also advantageous to store test results to disk for later analysis.

According to an embodiment of the invention, a computer based method for testing an optical monitoring system which is electrically connected to a computer for exchanging control and data signals therewith, the computer having input means for selecting test commands and display means for displaying screens of information to a user, comprises displaying on the display means at least one screen showing a plurality of user selectable commands; and performing programmed tests with the computer on the optical monitoring system based on user selected commands input with the input means.

In a further embodiment of the computer based method, wherein the optical monitoring system includes optical components and electrical circuitry which may be disposed in a cabinet, a light source, a light modifying wheel, a shutter, and a plurality of photodiode arrays having elements, disposed at respective stations for receiving light from a respective plurality of optical channels, and wherein the plurality of user selectable commands include a display command, an electrical systems test command, an optical dark test command, a beam alignment test command, a wavelength registration test command, a profile test command, and a filter test command, the method further comprises performing preliminary testing while monitoring the output of the optical monitoring system, the preliminary testing including commanding the optical monitoring system to rotate a light modifying wheel associated therewith to ensure the wheel is responsive, and monitoring the optical monitoring system to check the operation of a shutter associated therewith by checking pulses associated therewith; upon selection of a display command, monitoring with the computer output signals from the optical monitoring system, displaying a screen

representing photodiode array output on the computer display means, and selectively varying at least the array represented by the screen, the elements of the arrays represented by the screen, and the gain associated with an array element; upon selection of an electrical systems test command, monitoring the output of the optical monitoring system while selectively performing at least an electrical dark test to check the levels of dark current and noise associated with the electrical circuitry of the system, a digital bit test to check for stuck bits, i.e., that all bits change state, "toggle," at least once on command, in associated digital electrical circuitry of the system, a shutter speed test to check the rotational speed of the shutter, and a complete light modifying wheel test to test the accuracy of the light modifying wheel; upon selection of an optical dark test command, monitoring the output of the optical monitoring system to check the amount of ambient light leaking into the optical monitoring system through a cabinet associated therewith; upon selection of a beam alignment test command, monitoring the output of the optical monitoring system to check for cross-talk between optical channels of the optical monitoring system and for proper beam height; upon selection of a wavelength registration test command, monitoring the output of the optical monitoring system to determine the wavelength mid-frequency and bandwidth of each photodiode array element; upon selection of a profile test command, monitoring the output of the optical monitoring system to measure the amount of light reaching the photodetectors for each optical channel under normal operating conditions; and upon selection of a filter test command, monitoring the output of the optical monitoring system when different filters are used to test for proper operation.

In another embodiment of the computer based method, wherein the plurality of user selectable commands includes an all tests command, the method further comprises upon selection of the all tests command, after performing the



preliminary testing, performing the electrical systems test command, the optical dark test command, the beam alignment test command, the wavelength registration test command, the profile test command, and the filter test command automatically. In another embodiment of the computer based method, the filter test command tests the optical monitoring system with at least a BG36 filter and a liquid crystal clot simulator used.

Test result data is advantageously stored to disk for trending analysis. For example, minimum, maximum, average and standard deviation data can be stored for the photodiode arrays for a series of optical modules tested. This data can be subjected to statistical analysis to determine if any trends are apparent, for example, for the last one hundred modules tested.

In another embodiment of the computer based method, wherein each optical monitoring system has a unique serial number associated therewith, the method further comprises confirming the programmed tests are suitable for use with the optical monitoring system prior to their execution.

In an embodiment of a system for testing an optical module of an analytical device having optical components and electrical circuitry, the system comprises program means comprising program instruction and optical module parameters, for implementing a plurality of tests of at least one optical module; programmable means comprising a data processing system having processor means for executing the program instructions, memory means for storing program instructions and test data including optical module parameters, user input means for inputting commands, and display means for displaying screens of information to a user including a menu of available test commands, test results and other data; interface means for interfacing the optical module to the programmable means to facilitate exchange of control and data signals therewith; and fixture means for mounting the optical module during testing. The fixture means, besides providing a structure on which to

mount the optical module, enables testing of beam alignment and cross-talk. The fixture means simulates actual operational mounting on an MDA device.

Other objects, features and advantages of the invention will become apparent from the following detailed description taken in conjunction with the drawings, and appended claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic showing a known embodiment of an optical module;

10      Figure 2a is a block diagram of a test set-up for testing an optical module according to one embodiment of the invention;

Figure 2b shows the test covers with dimensions needed to perform the testing;

15      Figure 3 shows the cables for use in the test set-up of Figure 2;

Figures 4a to 4o are flow charts for an embodiment of the menu driven test method according to an embodiment of the invention;

20      Figures 5a to 5h illustrate the component parts of a mounting fixture for mounting the optical module during testing;

Figures 6a to 6f show the assembly of the parts of Figures 5.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

25      Figure 1 is a schematic of a multi-channel optical analyzer including the optical module. The multi-channel optical analyzer illustrated in Figure 1 is described in greater detail in U.S. Patent No. 5,002,392, which is  
30      incorporated herein by reference, and will only briefly be described herein to the extent necessary for understanding the present invention.

As shown in Figure 1, a broadband spectral light source 1, such as a tungsten-halogen or a Xenon lamp, which may  
35      include a diffuser (not shown), projects light towards a

slit forming device 3 which passes a beam 4 having the pattern of a slit. A short focal length collimator 5 follows the slit and is used to project the beam 4 in a pattern of a slit to infinity, thereby forming a slowly diverging beam 6. The slit length and collimator are chosen so that at a reasonable distance beam 6 has diverged to cover a plurality of reaction wells 7 containing the reaction volume (blood samples) to be optically monitored. Slit 3 may be formed, for example, of a stainless steel substrate 0.013mm thick having an air slit width of 100 $\mu$ m and length of 5.0mm. Collimator 5 may be an Edmund Scientific Co. Achromat No. J32,319, which has a focal length of 35mm, diameter of 25mm, center thickness of 13.50mm and which is antireflection coated with 1/4 wavelength  $MgF_2$ .

To make the optical system compact, beam 6 is folded a number of times by mirrors 9, 10 and 11 prior to being intercepted by a mask 13 having a plurality of openings 15 for dividing beam 6 into a plurality of individual beams 16 corresponding to the number of reaction wells 7 containing reaction volumes to be optically monitored. The divided beams are sized and spaced so that each beam passes through the desired portion of just one of the reaction wells 7. Reaction wells 7 are moved incrementally in the direction of arrow 8 from station to station, each station corresponding to the optical path of a respective one of the individual beams 16. The respective optical beams are also referred to herein as light channels. Although only 8 light channels are illustrated in Figure 1, the number of light channels built into a machine is a design choice. For example in one implementation of the machine developed by the assignee of the present application, there were 15 light channels, meaning that there were 15 light beams formed by mask 13 and each reaction well of a cuvette was moved incrementally through each light channel, residing at each station or channel long enough for the reaction volume to be optically

monitored to detect any change in the spectrum of the light beam transmitted therethrough.

After passing through reaction wells 7, beams 16 are intercepted by a rotating shutter 17 which sequentially passes the beams transmitted by the reaction volumes in reaction wells 7. The beams passing through shutter 17 are diffracted by transmitting diffraction gratings 19 in a known manner. Figure 1 shows four diffraction gratings 19 followed by four corresponding focussing lenses 21 for focussing the diffracted beams onto four corresponding photodiode arrays 23. Again, the number of diffraction gratings, focussing lenses and photodiode arrays is a design choice depending on how the light channels are to be time shared. The diffraction gratings are preferably high dispersion, high efficiency transmission holographic diffraction gratings having a pitch of  $0.8744\mu\text{m}$ .

Photodiode arrays 23 are arranged so that the spectrum of each diffracted beam falls across the linearly arranged photodiode elements of a respective one of the arrays. The optics of the system are such that a central element of each array 23 is the optical conjugate of slit 3. Photodiode arrays 23 each develop electrical signals corresponding to the spectral distribution falling on the array. Photodetector arrays 23 are oriented so that the spectrum of the diffracted beams falls across the linearly arranged photodetector elements and the optics of the system are such that a central element of each array 23 is an optical conjugate of slit 3. Each photodetector array may include 35 identical photodiodes each covering a spectral range of 390nm to 690nm with a spectral resolution of 10nm. Photodiode arrays of this type are available commercially from Hamamatsu Co. of Japan under part number S 2317-35Q. The light modifying wheel (LMW) 27 may be provided with an open position, a blocked (closed) position, a filter position in which the plurality of filters can be selectively inserted, and a position where a liquid crystal clot simulator (LCCS) is disposed in the light path. This

liquid crystal clot simulator (LCCS) is described in U.S. Patent Number 5,030,005, assigned to the assignee of the present application, hereby incorporated by reference.

Photodiode arrays 23 each develop electrical signals  
5 corresponding to the spectral distribution falling on the array. Arrays 23 are connected to scanning and recording electronics which sequentially scan the photodiodes for converting the electrical signals to digital signals and storing the digital signals in a computer memory, e.g.,  
10 RAM or disk storage, for further processing and evaluation.

Figures 2a and 2b are a block diagram showing an arrangement for testing an MDA optical module. As shown, the materials needed to conduct the testing according to  
15 an embodiment of the invention are the automatic acceptance test procedure (ATP) test station personal computer (PC) 202, an MDA optics power supply with cable 204, an MDA optical module with lamp for testing 205, an optical covers 206, e.g., photographer's cloth, including  
20 an instrument cover 206' and a track cover 206" for the optical module 205 and track fixture 208, a printed circuit board (PCB) data acquisition interface board 210, a beam alignment fixture having 3 pieces and two screws (not shown), the automatic test procedure software on a  
25 3-1/2" floppy disk 212 (one per MDA optical module), and a set of 7 optical filters (not shown). Track fixture 208 simulates the track which carries the samples of material into the optical module of an MDA. Initially the track fixture 208, if it can be bolted to the optical  
30 module under test, verifies that the optical module will fit the MDA properly. The track fixture is also important in that it assures that the light beams are at the proper height where they will pass through the material to be analyzed, as described later with respect  
35 to the beam height test. In this way the fixture simulates actual operational mounting of the optical module on an MDA.

## 11A

Setting up for the test procedure is as follows.  
With power off (and unplugged from power strip), install  
the lamp on the optical module, connect the lamp power  
supply to the lamp, connect the cable from the optical  
5 module external PCB

(printed circuit board) to the light tower PCB (the optical module is shipped with these circuit boards disconnected), connect the power supply to the optical module via the two connectors, connect the ribbon cable from the ATP test station PC (including a data acquisition board) to the optical module, plug in the PC and the power supply to the power strip, plug in the power strip to a 120 vac wall outlet, turn the PC on and then turn the power strip on.

After the PC is turned on, the software will load and testing can proceed by following the instructions displayed on the PC. When all tests have been completed, shutting down proceeds as follows. Turn off the PC, turn off the power strip, disconnect the power supply and PC from optical module, if placing optical module back in packing carton then disconnect the connector from the external PCB to the tower PCB, remove the lamp and reinstall lamp hold down screws in optical module.

The test procedures will first be summarized and then explained in more detail. Alignment and diagnostic tests include the display of all photodiode array elements of any of 15 (for example) stations, the display of any photodiode array element for all stations, and wavelength registration testing. Qualification testing includes traceability through serial number.

Features of electrical systems tests include electrical dark current, electrical noise, digital to analog convertor (DAC) and analog to digital (AD) bit tests, precision shutter speed tests, and light modifying wheel (LMW) tests.

Features of optical dark testing include optical leakage and optical noise tests. Features of wavelength tests include range of wavelengths realized, wavelength resolution, and wavelength calibration tests. Features of optical signal testing include usable signal, illumination uniformity, optical stability, cross-talk, and beam height tests. Features of filter testing include Bg36 filter and LCCS (liquid crystal clot simulator) testing. Mechanical compatibility with a test fixture emulating the MDA mounting

bracket is also confirmed. Appropriate test results and values may be recorded to disk for later use and analysis.

Acceptance test procedure (WP) will now be described  
5 in more detail. The is based on real time data acquisition by a PC 202 using a Burr-Brown Data Acquisition board 210. The software for performing the test procedures may be advantageously written in QuickBasic and may be run compiled or in the QuickBasic  
10 environment. The hardware requirements are as follows: A high speed PC, e.g., a 386 based PC operating at 40 MHz is needed to accept data s it is produced by the optical module. The PC should be equipped with at least a 40 megabyte hard disk, a 1.44Meg 3-1/2" disk drive, a VGA  
15 monitor and a Cyrix 387-40 coprocessor or equivalent. the PC should be configured (Config.sys file) to specify files=20 and buffers=20. A power supply system 211 should provide +12VDC @ 10 Amps, +28VDC @ 4 Amps, and 110 VAC @ 0.5 Amps, and be equipped with appropriate  
20 connector cables (see Figure 3).

The Burr-Brown Data Acquisition board 210 is installed inside the PC and should be a PCI 20002C Carrier with digital input/output (I/O) with the following modifications: cut trace P1, pin 31; cut trace  
25 P1, pin 33; jump Fuse 2 to P1 pins 33 and 34, set address to D000: Switch Position 1 2 3 4 5 6 8 on (+), and 7 9 10 off (-); and instal a 4.7K resistor from ground to each of P1 pins 19-29. The connector cable for the board (and the power supply) should be as shown in Figures 3a  
30 to 3c.

Software requirements are DOS 3.3 or higher (Required); QuickBasic Professional Ver 7.0 (used for development and changes only); and Masm, Microsoft Assembly Language Assembler Ver 5.0 or higher (used for  
35 development and changes only). The specification Appendix lists an embodiment of the testing software according to the invention.



13A

A 3-1/2" disk is shipped with each optical module. The disk must be formatted. It is advantageous to have only one disk for each MDA optical module, i.e., only data for one MDA optical module on each disk. The disk  
5 should accompany

the MDA optical module for future consultation. It is recommended that at least one backup disk be maintained. The ATP test program will prompt the user for automatic back up to hard disk. If a serial number already exists on the floppy disk the user is so notified. If files exist under a sub-directory of the disk, the user has the option of recording over those files or replacing the disk.

Also required are other fixturing items: a photographer's cloth and track cover (Figure 2b), track fixture, slider and gage, a set of spike (narrow bandpass) filters (Andover XXXFS10-25 or equivalent) of the following wavelengths: 405, 420, 450, 500, 546, 600, and 656nm.

The procedure for implementing the features of the ATP includes Instrument (optical module) Traceability - the part number with revision letter and serial number of the optical module must be permanently marked on the back of each optical module.

Disk Files - at the end of an evaluation the floppy disk contains a serial number file, a log file, a criteria file and two files for each test run. Those files are automatically placed in the appropriate sub-directory listed above and are copied to the hard disk if desired under file directory C:\MDA\FILES\<Serial Number>.

A file "Serial.Num" is produced in the root directory to contain the serial number of the optical module under test. A log file under each location's subdirectory logs tests attempted and test results. A file "Crit.prn", containing all the criteria from which tests are evaluated against, is copied from the hard disk to the tester's directory on the floppy disk. Two files, an Error file and a Results file, are produced for each of the following tests: Electrical Systems Check, Optical Dark Current, Optical Beam Alignment, Wavelength registration, Optical Profile, Bg36 Filter evaluation, and LCCS Evaluation. The Error file, one file for each test, includes a list of errors which caused a test to fail. The disk file combines the test name and an ".err" extension for the file name.

The Result file, a second file for each test, includes test criteria and details of the performance for each photodiode of the array. The disk file combines the test name and a ".prn" extension. These ".prn" files are formatted to be  
5 imported into a spread sheet program, such as Lotus 123, as numbers.

Optical module testing proceeds as follows. Disk - The user is asked to insert a disk in drive "A:". The following subdirectories will be automatically added if they do not  
10 already exist: "KMC", "OKC", "DUR", and "TEST".

Code Name - The user is asked to enter a location code where applicable. The code for, for example, Kollsman is "KMC", Oklahoma is "OKC", Durham is "DUR", and Testing is "TEST". All files are placed in the appropriate subdirec-  
15 tor, based on the location code.

Criteria - The criteria for each test, data file "C:\MDA\FILES\CRIT.XXX" (where XXX is a three character location code), are loaded at the beginning of the program. The entire file is copied to the user's sub-directory. Test  
20 specific criteria are recorded at the beginning of each test file.

Wavelength - If the disk has a reasonable wavelength registration file recorded then those parameters for determining wavelength are read.

25 Menu - The user is presented with a menu from which to select tests (see Figure 4a). The desired test is selected by pressing the corresponding letter. <Enter> need not be pressed after pressing the desired letter. The tests must be run contiguously in the order in which they appear in the  
30 menu. If the optical module fails a current test, the succeeding test will not run. If a test fails or if the program is interrupted, the user must begin testing at the beginning. Selecting "A" from the main menu will cause all tests to be run in order (see Figure 4b).

35 Specific tests will now be described in more detail. Display (Figure 4c) - After selecting "D" from the main

menu, a screen of 35 elements for position (station) one will be displayed (positional display). If wavelength has already been determined, each element will be displayed in the color of light on that element, otherwise all elements are displayed in white. The positional display visually indicates the output levels of the array elements, and may be take the form of color, intensity or height variations, for example, representing the different output levels. A user can thereby readily observe how an array and/or element is behaving.

A sub-menu is displayed on the right. Pressing sub-menu letter "E" (Figure 4k) when the display is showing all elements of one station (position), changes the display from a positional display to a display of one element for all 15 positions (elemental display). Pressing "E" followed by a number and <enter> when the display is already in the elemental mode allows the user to jump to any corresponding element number. Pressing the <right arrow> key in the elemental mode increments the element number being displayed by 1. Pressing the <left arrow> key in the elemental mode decrements the element number being displayed by one.

Pressing "P" when the display is showing one element for all positions, changes the display from a elemental display back to a display of all elements for one position. Pressing "P" followed by a number and <enter> when the display is in the positional mode allows the user to jump to any position number. Pressing the <right arrow> key in the positional mode increments the position number being displayed by 1. Pressing the <left arrow> key in the positional mode decrements the position number being displayed by one.

Pressing "E" followed by a number and <enter> when the display is in the positional mode allows the user to select any corresponding element number. Subsequently pressing the <right arrow> key in this mode increments the element number selected by 1, and pressing the <left arrow> key decrements the element number selected by one.

The gain of an element signal amplifier is typically preset to 170/4095, however any gain may be selected as desired. A gain of 170/4095 is selected to provide an adequate dynamic range, so that at maximum element output signal levels, the element signal amplifiers remain unsaturated. Pressing sub-menu letter "G" (see Figure 4l) followed by a number and <enter> changes the gain to the number entered divided by 4095. Pressing the <up arrow> key increments the gain by 10. Pressing the <down arrow> key decrements the gain by 10.

Pressing sub-menu letter "N" (Figure 4l) normalizes the array signal to a preprogrammed (not user selectable) value by mathematical selection of individual elemental gain values. Pressing "G" followed by a number, <up arrow>, or <down arrow>, restores the gain to a constant value.

Pressing sub-menu letter "S" (Figure 4m) changes the y axis scale to display from 0 to 270 only. This is used to evaluate dark and very low light levels. Pressing sub-menu letter "S" a second time returns the scale to normal (0 to 4000). Pressing sub-menu letter "W" (Figure 4n) causes the light modifying wheel to increment position by one. Pressing sub-menu letter "Q" (Figure 4o) or any other undefined key returns the user to the main menu.

Preliminary testing will now be described (see Figure 4d). These tests are done automatically to ensure that the other tests described below are capable of running, that is, that the shutter is running and the LMF is operating. First, the light modifying wheel is rotated in turn to both positive stops which ensures that the light modifying wheel is responsive, and then a rough check of the shutter is performed to see if pulses are present and within 80% of tolerance.

Electrical systems tests will now be described (see Figure 4e). These tests are to determine basic electronics operations. Electrical Dark Test - This test checks the performance of the electronics used in the detection of

optical signal. Dark current levels and electronic noise are measured. The user is instructed to disconnect the lamp (or turn off the lamp supply) and cover the optical module so as to eliminate any ambient light. The ATP scans the photodiode array 100 times. After each scan, a rolling sum and rolling standard deviation is calculated. At the end of 100 scans, the average for each photodiode element is compared to a minimum and a maximum signal level and the standard deviation is compared to a maximum RMS noise level.

10 The variables LOWEDK and MAXEDK define the lower and upper limits of acceptable dark current in the program criteria. NOISYEDK defines the maximum RMS noise acceptable. A minimum signal of 0 counts, a maximum signal of 100 counts and a maximum RMS noise of 2.5 counts is acceptable.

15 Digital bit testing, an electrical systems test, will now be described. The gain DAC, A to D converter, and interface are checked for "stuck" bits, i.e., bits that will not change, "toggle," from logical "1" to "0" or vice versa. 20 The DAC is checked by first normalizing the signal. Then the DAC values are checked to ensure that each bit toggled at least once. Next the A to D converter is checked. After setting a constant gain, the detectors are scanned and the values are checked to ensure that each bit toggled at least 25 once.

The shutter speed test, an electrical systems test, is now described. The ATP counts interrupts by polling the interrupt signal as a digital I/O TTL signal. In order to test for required accuracy with the current digital resolution, this test runs silently for 5 minutes. After 5 30 minutes, the number of interrupts counted is divided by the PC clock timer. The program variable RPSTIME is defined as the criteria for the length of time the test must run in order to achieve the desired resolution. The variables 35 HIGHRPS and LOWRPS define the upper and lower acceptable limits. A calculated speed of 5.00 RPS (+/- 0.1 RPS) is acceptable.

Light modifying wheel testing, an electrical systems test, is now described. A complete test is performed by commanding the wheel to move clockwise to each of the next 3 positions and then back counterclockwise to each of 3 positions. Any move must be completed within a prescribed time period, e.g., 5 seconds. Any failure causes the test to halt.

After the electrical systems tests are completed successfully, data associated therewith is stored. Otherwise, flow returns to the main menu display.

The optical dark test (see Figure 4f) is used to determine the amount of ambient light leaking through the box, i.e., the optical module cabinet. The user is instructed to reconnect the lamp (or turn on the lamp supply) and cover only the optical module track area. This test should be performed in a normally lit room so as to measure the effect of ambient light from all sources. The ATP scans the photodiode array 100 times. After each scan a rolling sum, and rolling standard deviation for each photodiode element is calculated. At the end of 100 scans, the average for each photodiode element is compared to a minimum and a maximum signal level and the standard deviations are compared to a maximum RMS noise level. The variables LOWODK AND HIGHODK define the lower and upper levels of acceptable ambient light in the program criteria. NOISYODK defines the maximum RMS noise acceptable. A minimum signal of 0 counts, a maximum signal of 100 counts and a maximum RMS noise of 2.5 counts is acceptable.

The beam alignment test (see Figure 4g) determines how much light for one optical channel is bleeding onto another optical channel's detector (cross talk) and whether the height of the beam is within tolerance (beam height). The track fixture is important in determining the proper beam height, as mentioned above. The user is instructed to be sure the lamp is on and that the track is reasonably covered. The ATP then measures dark current for 10 scans with the light modifying wheel in the blocked position. The

average of the 10 scans is ZDARK, for each element. The user is now instructed to place a blocking device known as a slider, for blocking one or more optical channels with both adjacent channels unobstructed, in the track with the slider placed in the track fixture as far left (away from the shutter motor) as possible. Signal gain for each element is at maximum (4095/4095). The average of the raw signal (RAW) from 10 scans minus ZDARK becomes ZCROSS (cross-talk) for each blocked element:

10                   ZCROSS = RAW - ZDARK

The user is instructed to place the slider in the middle position and finally in the full right position. Similarly, the average of the signal from 10 scans minus the dark current becomes ZCROSS for each of the new sets of blocked elements. The ATP compares the normal signal ZNORM to ZCROSS with the predefined maximum crosstalk, defined in the program criteria as MAXCROSS. The maximum crosstalk to signal acceptable is 0.1 %. The user is now instructed to place the beam height gage in the center position. The signal without the gage is compared to the signal with the gage. No more than 99% difference in signal intensity is acceptable.

The wavelength registration test (see Figure 4h) determines the wavelength mid-frequency and bandwidth for each detector of an array. The user is instructed to be sure the lamp is on and that the track is reasonably covered. The ATP then measures dark current for 10 scans with the light modifying wheel in the blocked position. The average of the 10 scans is ZDARK for each element. A preliminary profile test is performed to ensure that a reasonable amount of light can be sensed by each detector. The profile minimum is about 1/2 of the final required value as defined in the program as MINPRO where  $MINPRO = 1/2(ZPRO0 + ZPRO1 * X + ZPRO2 * X^2 + ZPRO3 * X^3 + ZPRO4 * X^4 + ZPRO5 * X^5 + ZPRO6 * X^6 + ZPRO7 * X^7 + ZPRO8 * X^8)$ , and where:



21

ZPRO0 = -139.78,           ZPRO1 = 148.51,  
ZPRO2 = -55.276,        ZPRO3 = 10.446,  
ZPRO4 = -0.99866,       ZPRO5 = 0.055139,  
ZPRO6 = -0.0017867,    ZPRO7 = 3.1212E-5,  
5       ZPRO8 = -2.2519E-7

and X is the index into the detector array for elements 1 through 35.

10       The signal is then normalized by the ATP by selecting individual gain values for each element so as to balance the signal at a preprogrammed (not user selectable) level. For each of seven filters, the peak is found by fitting a Gaussian curve to the signal detected with a filter in place. The user is asked to confirm that the peak for each position is reasonable. The user then has the option to  
15       reposition the filter and try again (by pressing "R") abort the wavelength determination, (by pressing "A") , or continuing (by pressing "Y"). After all filters have been evaluated a linear regression is determined by a least squares fit.

20       The test passes if the calculated smallest wavelength (element 1) is less than or equal to the specified low wavelength, the calculated largest wavelength (element 35) is greater than or equal to the specified high wavelength, and the residual of each regression is greater than the  
25       criteria minimum. The maximum acceptable low wavelength is defined in the program as LOWWVLNTH. The minimum high wavelength is HIGHWVLNTH, and the correlation coefficient is defined as ZRESIDUAL. For example, the maximum acceptable low wavelength may be 395nm, the minimum acceptable high  
30       wavelength 710nm, and the correlation coefficient (R-2) greater than 0.9992.

35       The optical profile test (see Figure 4i) measures the amount of light reaching the detectors and the signal to noise ratio for each of 15 optical channels under normal operating conditions. The user is instructed to be sure the lamp is on and that the track is reasonably covered. The ATP then measures dark current for 10 scans with the light

modifying wheel in the blocked position. The average of the 10 scans divided by its gain value (4095) becomes ZDARK for each element. The gain is then set to 170/4095 for all optical channels. The ATP calculates an element number  
 5 based on each of 32 wavelengths to test. The signal value for each wavelength is interpolated from the closest discrete elements corresponding to the desired wavelength.

The average of the 10 scans is compared with a maximum value (not saturated) and with a minimum value calculated  
 10 using a polynomial based on a typical signal defined at the beginning of the program. The signal divided by the standard deviation of each element:

$$ZAVG / ZRMS$$

is likewise compared to a maximum optical RMS noise value.  
 15 This comparison ensures that the combination of noise sources (electrical noise, optical noise, and shutter motor instability) will not significantly distort the usable signal. The minimum signal is calculated in the program as MINPRO where  $MINPRO = ZPRO0 + ZPRO1 * X + ZPRO2 * X^2 + ZPRO3 * X^3 + ZPRO4 * X^4 + ZPRO5 * X^5 + ZPRO6 * X^6 + ZPRO7 * X^7 + ZPRO8 * X^8$ , and  
 20 where

$$\begin{aligned} ZPRO0 &= -139.78, & ZPRO1 &= 148.51, \\ ZPRO2 &= -55.276, & ZPRO3 &= 10.446, \\ ZPRO4 &= -0.99866, & ZPRO5 &= 0.055139, \\ 25 \quad ZPRO6 &= -0.0017867, & ZPRO7 &= 3.1212E-5, \\ ZPRO8 &= -2.2519E-7 \end{aligned}$$

and X is the element index into the detector array for wavelengths every 10nm from 400nm to 710nm.

The maximum is defined in the program criteria as  
 30 MAXPRO where  $MAXPRO = 4000$  counts. The minimum signal to noise ratio is defined as MINS2N such that  $MINS2N = ZS2NO + ZS2N1 * X + ZS2N2 * X^2 + ZS2N3 * X^3 + ZS2N4 * X^4 + ZS2N5 * X^5 + ZS2N6 * X^6 + ZS2N7 * X^7 + ZS2N8 * X^8$ , and where:

23

ZS2NO = -221,                      ZS2N1 = 296.43,  
ZS2N2 = -126.41,                  ZS2N3 = 28.16,  
ZS2N4 = -3.0109,                  ZS2N5 = 0.17263,  
ZS2N6 = -0.0054823,              ZS2N7 = 9.104E-5,  
5                      ZS2N8 = -6.1752E-7

and X is the element index into the detector array for wavelengths every 10nm from 400nm to 710nm.

The filter testing (Figure 4j) covers the two miscellaneous filters in the MDA optical module the BG36, filter  
10 and the LCCS filter. For both tests the user is instructed to be sure the lamp is on and that the track is reasonably covered. The ATP then measures dark current for 10 scans with the light modifying wheel in the blocked position. The average of the 10 scans is ZDARK for each element.

15            The signal is then normalized by the ATP by selecting individual gain values for each element so as to balance the signal at a preprogrammed (not user selectable) level.

BG36 Filter - The light modifying wheel is set in the BG36 filter position. At each of three wavelengths (493nm,  
20 548nm, and 653nm), the peak is found by fitting a Gaussian curve to the signal detected around the element expected to show a peak for that wavelength. The test passes if the calculated element for each wavelength corresponds to the calculated element determined by the wavelength  
25 determination found in the wavelength registration test. This variation in the realized element and the calculated element is defined in the program criteria as MINBG36 and MAXBG36. The maximum variation from the calculated element to the realized element is 0.25 elements.

30            LCCS Filter - The light modifying wheel is set in the LCCS position. At each of three commanded LCCS levels (low, mid, and high), the average signal of 10 scans is compared to an expected value at element number 21. The error between the expected signal level (LCCS\$(LEVEL,EXPECT)) and  
35 the measured signal level is calculated in the program and compared with the criteria, LCCS\$(LEVEL,TOLERANCE) for each of three levels.

The component parts and the assembly of a mounting fixture used during testing the optical module are shown in Figures 5 and 6. All of the parts are made of stainless steel. Figure 5a shows the part 213, of which  
5 two are required. Figure 5b shows the part 214, of which one is required. Figure 5c shows the part 215, of which one is required. Figure 5d shows the part 216, of which one is required. Figures 5e and 5f shows parts 217 and 218 respectively, of which one each is required. Figure  
10 5g shows the part 219, of which one is required. Figure 5h shows the part 220, of which one is required.

Figure 6a shows a first portion of the mounting fixture assembled from the component parts of Figures 5, Figure 6b showing a detail of Figure 6a. Figures 6c, 6d,  
15 6e and 6f show other portions of the assembly of the parts of Figures 5, as well as various connectors 221, 222, 223, 224.

The apparatus and method for testing the optical module of an MDA device, in particular, for performing alignment, diagnostic tests and qualification testing described above may be subject to various modification within the scope of the invention. For example, in the described embodiment, the test results and parameters are stored on a disk shipped with the optical module, however certain information, for example, the serial number and test parameter data for a particular optical module could be stored in read only memory (ROM) provided with the module. This information could then be downloaded to the testing computer upon beginning the test procedure. Or the complete test software could be so stored and shipped with the optical module.

In the described embodiment, the test software operates interactively with a user, however completely automatic operation could be achieved with only minor modifications. Instead of instructing the user to cover the module, for example, the program could command a robot arm to place a cover over the module, making the test procedure completely machine implemented. A plurality of test stations could be provided each having an optical module for testing and each under the control of a central computing system for performing the tests simultaneously on the plurality of modules.

In the described embodiment, the software is implemented in the BASIC computer language for use with a personal computer, however any other computer and/or computer language could be used for implementation within the scope of the invention. Likewise, the particular mounting fixture described could be adapted to different optical modules within the scope of the invention. The serial number of a module could be associated with a particular mounting arrangement and/or specific tests and test parameters, so that a test apparatus according to the invention is useful for a collection of optical module varieties.

It will be understood that the above description of the present invention is susceptible to various modifications, changes and adaptations, and the same are intended to be comprehended within the meaning and range of equivalents of  
5 the appended claims.

**WHAT IS CLAIMED IS:**

1. A computer based method for testing an optical monitoring system which is electrically connected to a computer for exchanging control and data signals therewith, the computer having input means for selecting test commands and display means for displaying screens of information to a user, the method comprising:

displaying on the display means at least one screen showing a plurality of user selectable commands; and

performing programmed tests with the computer on the optical monitoring system based on user selected commands input with the input means.

2. The computer based method according to claim 1, wherein the optical monitoring system includes optical components and electrical circuitry, a light source, a light modifying wheel, a shutter, and a plurality of photodiode arrays having elements, the arrays being disposed at respective stations for receiving light from a respective plurality of optical channels; and

wherein the plurality of user selectable commands include a display command, an electrical systems test command, an optical dark test command, a beam alignment test command, a wavelength registration test command, a profile test command, and a filter test command.

3. The method according to claim 2, further comprising:

performing preliminary testing while monitoring the output of the optical monitoring system, the preliminary testing including commanding the optical monitoring system to rotate a light modifying wheel associated therewith to ensure the wheel is responsive, and monitoring the optical monitoring system to check a shutter associated therewith by checking for pulses associated therewith.

4. The method according to claim 2, wherein upon selection of a display command, the method further comprises monitoring with the computer the photodiode array output signals from the optical monitoring system, displaying a screen representing the photodiode array output on the computer display means, and selectively varying at least the array represented by the screen, the elements of the arrays represented by the screen, and amplifier gain associated with an array element.

5. The method according to claim 2, wherein upon selection of an electrical systems test command, the method further comprises monitoring the output of the optical monitoring system while selectively performing at least:

- an electrical dark test to check the levels of dark current and noise associated with the electrical circuitry of the system;

- a digital bit test to check that all bits change state at least once on command in associated digital electrical circuitry of the system;

- a shutter speed test to check the rotational speed of the shutter; and

- a complete light modifying wheel test to test the accuracy of the light modifying wheel.

6. The method according to claim 5, wherein upon selection of an electrical dark test, the method further comprises:

- instructing the user to disconnect or turn-off the lamp supply in the optical monitoring system, and to cover the optical monitoring system to block ambient light to the photodiode arrays; and

- monitoring the output of the optical monitoring system to check levels of dark current and noise associated with the electrical circuitry of the optical monitoring system.



7. The method according to claim 6, wherein the step of monitoring the output of the optical monitoring system comprises:

scanning the photodiode array a predetermined plurality of times;

after each scan in the scanning step, a rolling sum and a rolling standard deviation for each photodiode element is produced;

at the end of the predetermined plurality of scans, producing and comparing an average value for each photodiode element of the photodiode array to minimum and maximum signal level criteria; and

determining a standard deviation for each photodiode element and comparing the standard deviations to maximum noise level criteria.

8. The method according to claim 7, wherein the predetermined plurality of scans is 100, the minimum signal level is 0 counts, the maximum signal level is 100 counts, and the maximum noise level is 2.5 counts.

9. The method according to claim 5, wherein the optical monitoring system includes at least a digital to analog converter, an analog to digital converter and an interface, and wherein upon selection of a digital bit test, the method further comprises checking at least the digital to analog converter, the analog to digital converter and the interface for stuck bits by sending and receiving signals to and from the optical monitoring system with the computer to ensure that each bit changes state at least once.

10. The method according to claim 5, wherein upon selection of a shutter speed test, the method further comprises:

polling interrupt signals from the optical monitoring system shutter for a predetermined period of time

and keeping a count of the number said interrupt signals received;

dividing the number of interrupts counted by a clock timer of the computer to produce a calculated speed for the shutter; and

comparing the calculated speed to predetermined upper and lower acceptable speed values.

11. The method according to claim 5, wherein upon selection of a complete light modifying wheel test, the method further comprises:

commanding the light modifying wheel to move clockwise a predetermined plurality of positions and then back counterclockwise the predetermined plurality of positions;

determining the accuracy of position of the light modifying wheel; and

determining whether the light modifying wheel completes each respective move within a predetermined period of time.

12. The method according to claim 5, wherein upon completion of a test of said electrical systems test command which are selectively performed, the method further comprises storing test result data associated with the test performed.

13. The method according to claim 2, wherein upon selection of an optical dark test command, the method further comprises:

monitoring the output of the optical monitoring system with only a track area associated therewith covered to check for ambient light leaking into the optical monitoring system through a cabinet associated with the optical monitoring system.

14. The method according to claim 13, wherein the step of monitoring the output of the optical monitoring system comprises:

scanning the photodiode array a predetermined plurality of times;

after each scan in the scanning step, a rolling sum and a rolling standard deviation for each photodiode element is produced;

at the end of the predetermined plurality of scans, producing and comparing an average value for each photodiode element of the photodiode array to minimum and maximum signal level criteria; and

determining a standard deviation for each photodiode element and comparing the standard deviations to maximum noise level criteria.

15. The method according to claim 14, wherein the predetermined plurality of scans is 100, the minimum signal level is 0 counts, the maximum signal level is 100 counts, and the maximum noise level is 2.5 counts.

16. The method according to claim 2, wherein upon selection of a beam alignment test command, the method further comprises monitoring the output of the optical monitoring system to check for cross-talk between optical channels of the optical monitoring system and for proper beam height.

17. The method according to claim 16, wherein checking for cross-talk comprises:

(a) instructing the user to be sure the lamp is on and that the track is reasonably covered;

(b) measuring dark current for 10 scans with the light modifying wheel in a blocked position;

(c) determining a first average based on the 10 scans for each photodiode element;

(d) instructing the user to place a blocking device in the track at one of a plurality of specified positions, thereby blocking at least one optical channel associated with a respective photodiode array with adjacent channels unobstructed;

(e) setting the signal gain for each photodiode array at a maximum level;

(f) measuring the photodiode current for the respective photodiode element associated with the at least one blocked optical channel for 10 scans with the blocking device at the specified position;

(g) determining a second average based on the 10 scans for each photodiode element;

(h) determining the difference between the first and second averages to thereby determine a cross-talk level;

(i) instructing the user to place the blocking device in the track at another one of the plurality of specified positions;

(j) repeating steps (f) to (i) a predetermined number of times; and

(k) comparing determined cross-talk levels with a predetermined acceptable maximum cross-talk.

18. The method according to claim 16, wherein checking for proper beam height comprises:

monitoring the signal from the optical monitoring system;

instructing the user to place a beam height gage in a predetermined position;

monitoring the signal with the beam height gage in place;

comparing the signal without the beam height gage to the signal with the beam height gage to determine a measured difference value; and

comparing the measured difference value to a predetermined acceptable difference value.

19. The method according to claim 2, wherein upon selection of a wavelength registration test command, the method further comprises monitoring the output of the optical monitoring system to determine the wavelength mid-frequency and bandwidth of each photodiode array element.

20. The method according to claim 19, wherein the method further comprises:

- instructing the user to be sure the lamp is on and that the track is reasonably covered;

- measuring dark current for 10 scans with the light modifying wheel in a blocked position;

- determining a first average based on the 10 scans for each photodiode element;

- performing a preliminary profile test to ensure that a minimum amount of light can be sensed by each array element;

- normalizing the signal from the array by selecting individual gain values for each element so as to balance the signal at a preprogrammed level;

- fitting a Gaussian curve to a respective signal detected with each of a plurality of filters in place to find a respective peak signal;

- prompting the user to confirm that a peak for a filter position is acceptable;

- prompting the user to select one of a plurality of options, the plurality of options including repositioning a filter and repeating the above steps, aborting the wavelength determination process, or continuing;

- determining a linear regression using a least squares fit after all filters have been evaluated thereby producing coefficients and residual values of the least squares fit, and calculating a smallest wavelength and a largest wavelength using the coefficients; and

- comparing the calculated smallest wavelength, the calculated largest wavelength, and the residual values of the least squares fit with predetermined values.

21. The method according to claim 2, wherein upon selection of a profile test command, the method further comprises monitoring the output of the optical monitoring system to measure the amount of light reaching the photo-detectors and the signal to noise ratio for each optical channel under normal operating conditions.

22. The method according to claim 21, further comprising:

instructing the user to be sure the lamp is on and that the track is reasonably covered;

measuring dark current for 10 scans with the light modifying wheel in a blocked position;

determining a first average based on the 10 scans for each photodiode element;

setting the gain for each element to a predetermined value for all optical channels;

determining an element number based on each of a plurality of wavelengths to test;

interpolating the signal value for each wavelength from the closest discrete elements corresponding to the desired wavelength;

determining an average of the 10 scans;

comparing the average of the 10 scans with a maximum value and with a minimum value determined using a polynomial based on a typical signal; and

comparing the signal divided by a standard deviation for each element to an optical RMS noise value.

23. The method according to claim 2, wherein upon selection of a filter test command, the method further comprises monitoring the output of the optical monitoring system when different filters are used to test for proper operation.

24. The computer based method according to claim 23, wherein the filter test command tests the optical monitoring

system with at least one of a schott glass BG36 filter and a liquid crystal clot simulator used.

25. The method according to claim 23, wherein a schott glass BG36 filter is used and the method further comprises:

instructing the user to be sure the lamp is on and that the track is reasonably covered;

measuring dark current for 10 scans with the light modifying wheel in a blocked position;

determining a first average based on the 10 scans for each photodiode element;

normalizing the signal from the array by selecting individual gain values for each element so as to balance the signal at a preprogrammed level;

setting the light modifying wheel in the schott glass BG36 filter position; and

determining a peak signal for each of a plurality of wavelengths corresponding to the peak transmittance of the filter by fitting a Gaussian curve to the signal detected around the element expected to show a peak for that wavelength.

26. The method of claim 23, wherein a liquid crystal clot simulator is used and the method further comprises:

instructing the user to be sure the lamp is on and that the track is reasonably covered;

measuring dark current for 10 scans with the light modifying wheel in a blocked position;

determining a first average based on the 10 scans for each photodiode element;

normalizing the signal from the array by selecting individual gain values for each element so as to balance the signal at a preprogrammed level;

setting the light modifying wheel in the liquid crystal clot simulator position; and

monitoring array output with the liquid crystal clot simulator in position and comparing the output to predetermined expected output values.

27. The computer based method according to claim 2, wherein the plurality of user selectable commands further includes an all tests command, the method further comprising:

upon selection of the all tests command, after performing the preliminary testing, performing the electrical systems test command, the optical dark test command, the beam alignment test command, the wavelength registration test command, the profile test command, and the filter test command automatically.

28. The computer based method according to claim 2, further comprising prompting the user to manually adjust certain portions of the optical monitoring system during performance of the test commands.

29. The computer based method according to claim 1, wherein each optical monitoring system has a unique serial number associated therewith and wherein the method further comprises confirming the programmed tests are suitable for use with the optical monitoring system prior to their execution.

30. A system for testing an optical module of an analytical device having optical components and electrical circuitry, the testing system comprising:

program means comprising program instructions and optical module parameters, for implementing a plurality of tests of at least one optical module;

programmable means comprising a data processing system having processor means for executing the program instructions, storage means for storing program instructions and test data including the optical module parameters, user




input means for inputting commands, and display means for displaying screens of information to a user including a menu of available test commands, test results and other data;

interface means for interfacing the optical module to the programmable means to facilitate exchange of control and data signals therewith; and

fixture means for test mounting the optical module during testing and simulating actual operational mounting on the analytical device.

FIG. 1

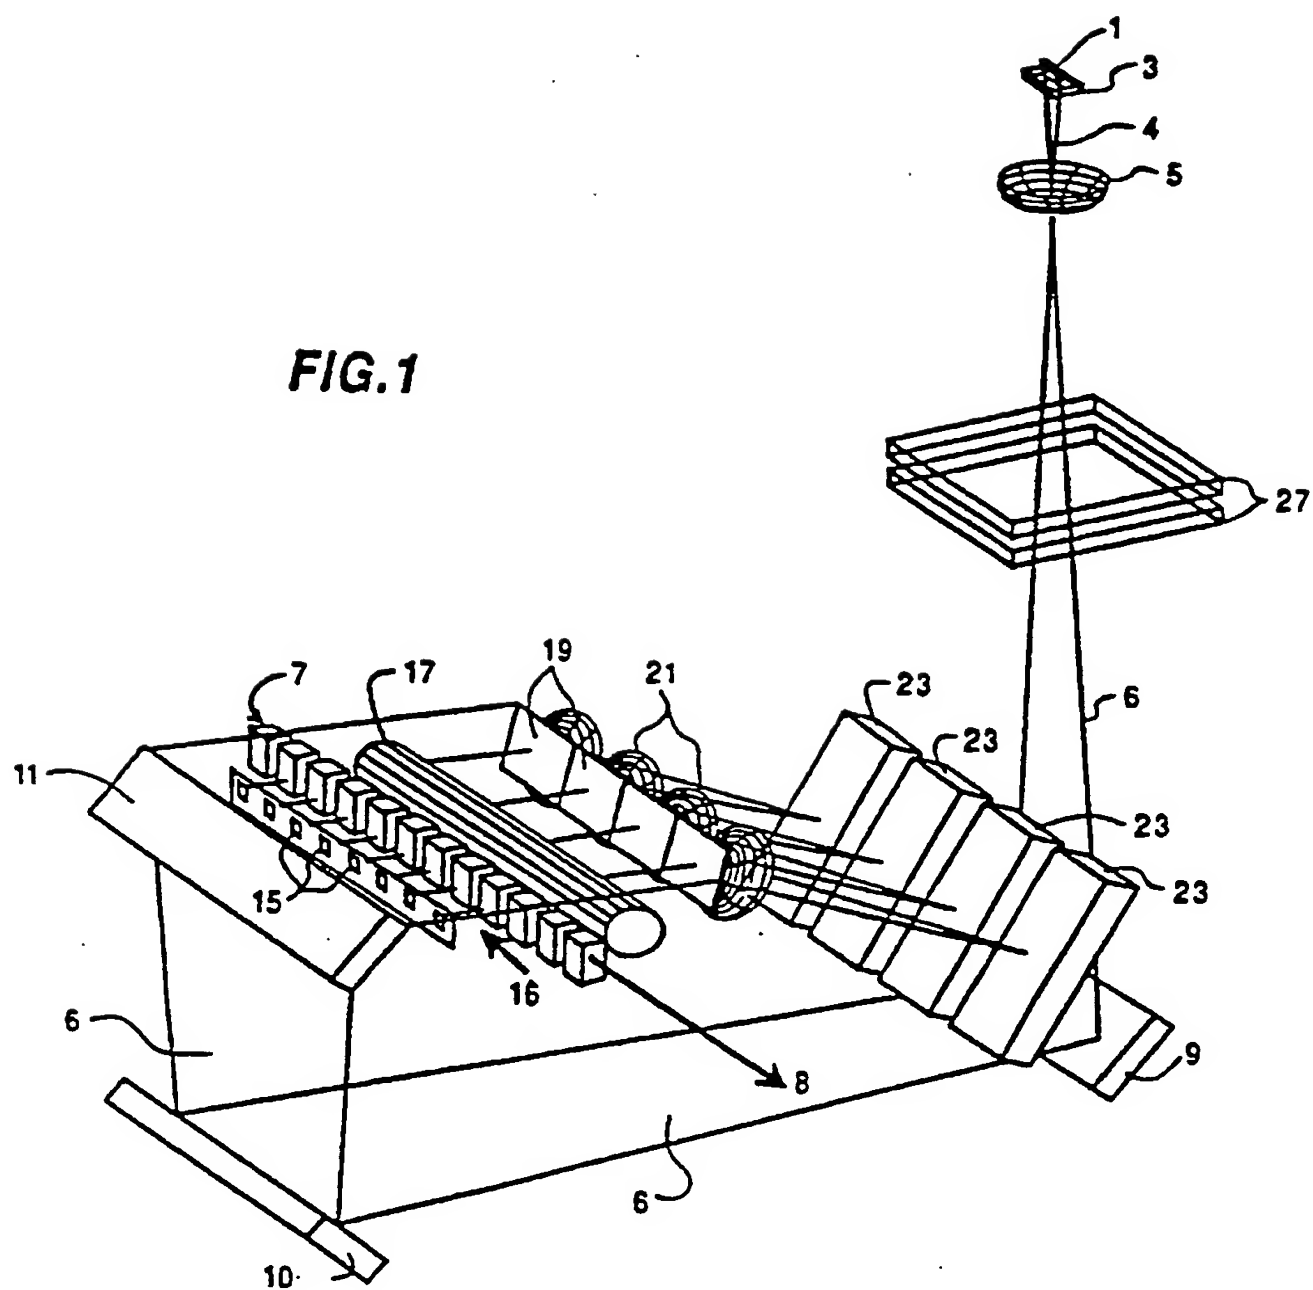

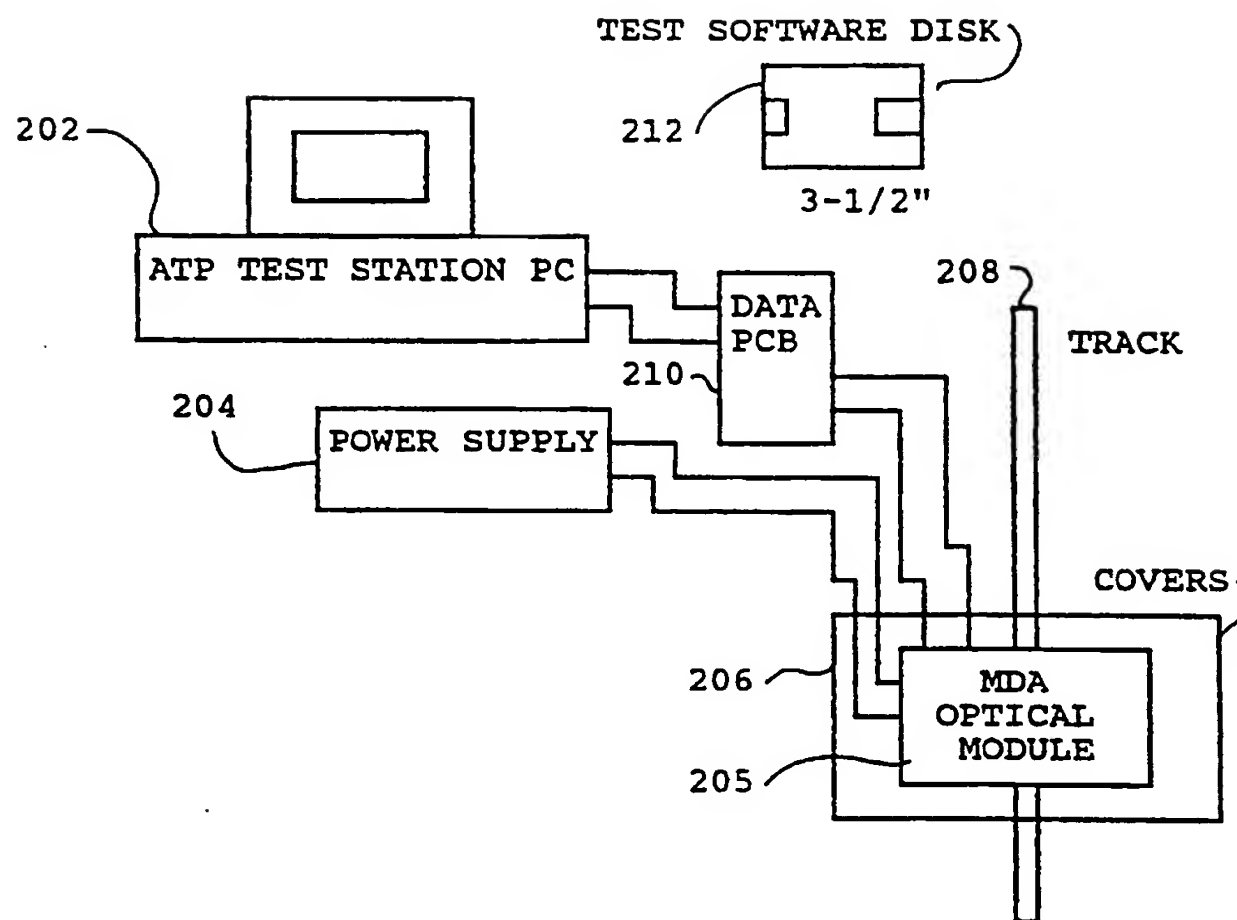


Figure 2a

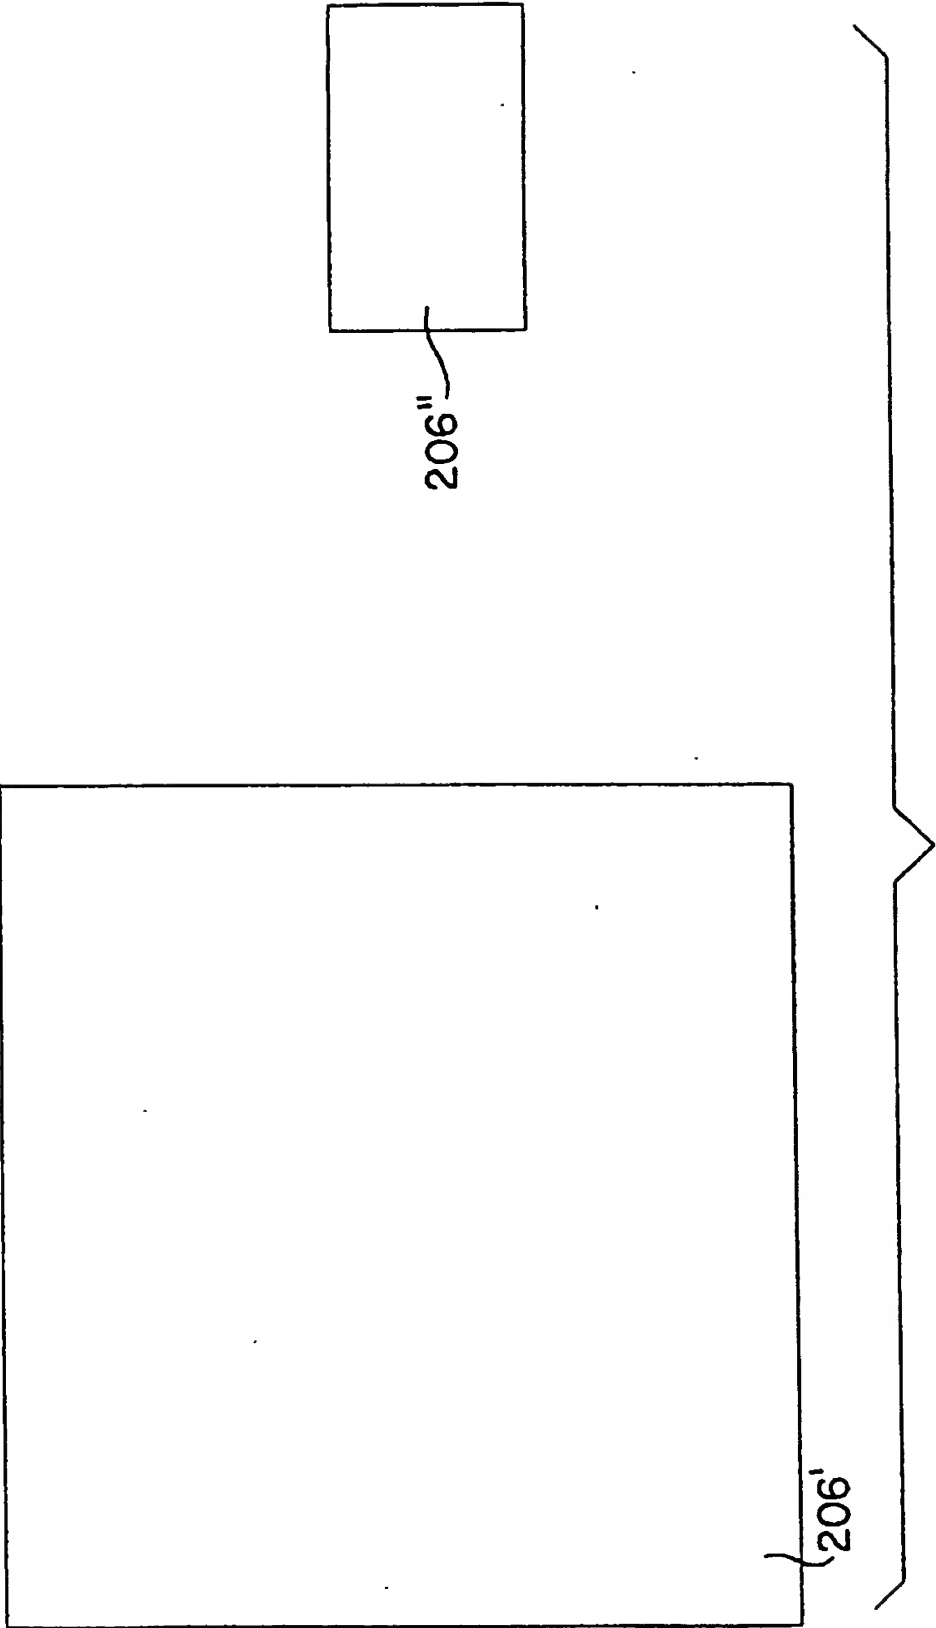


FIG. 2b

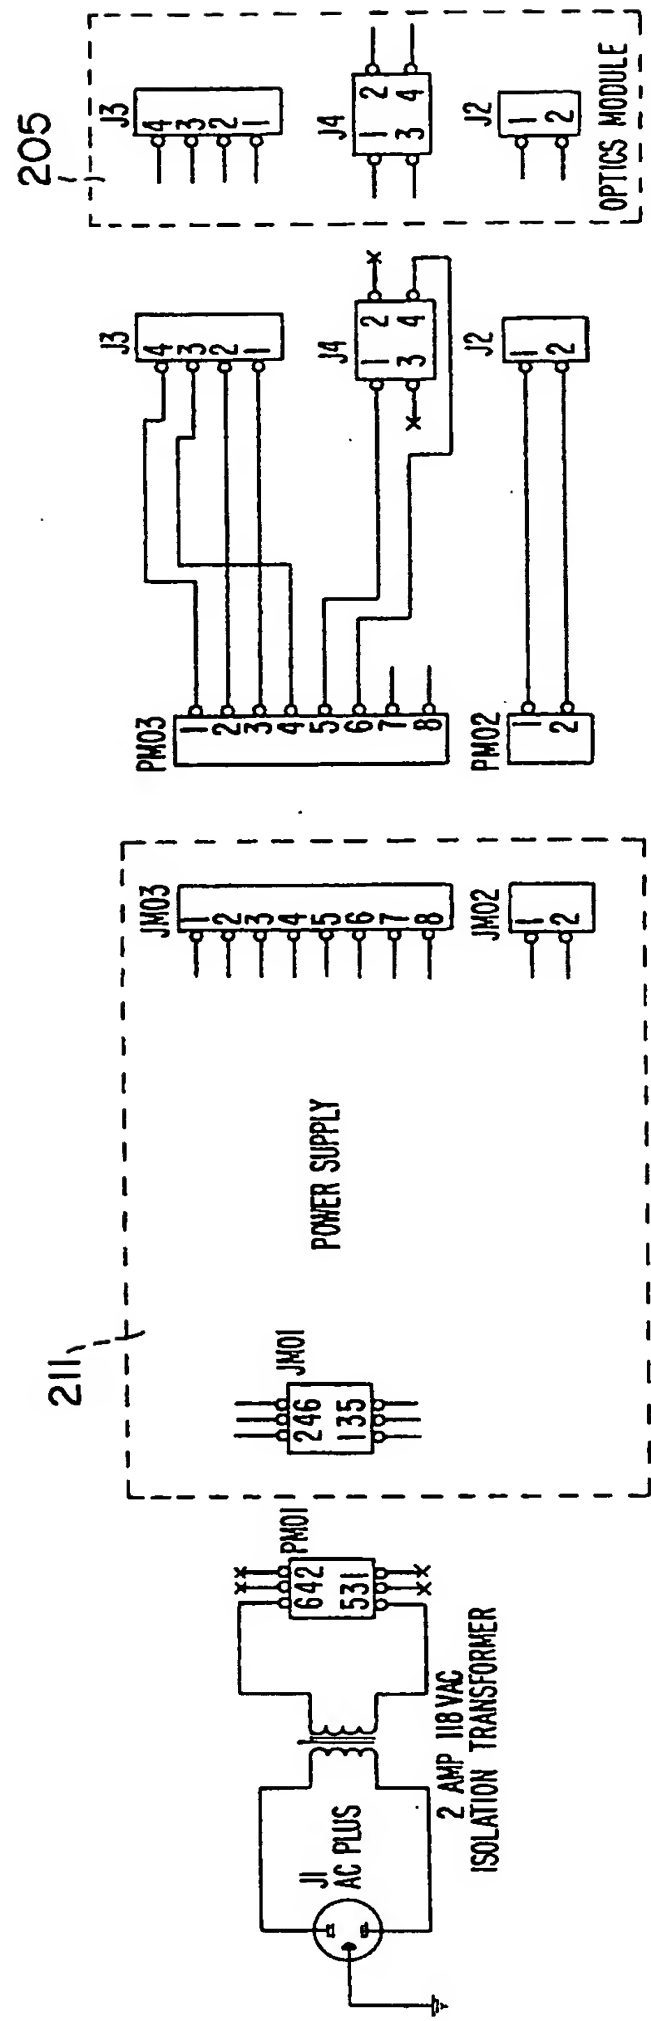


FIG. 3a

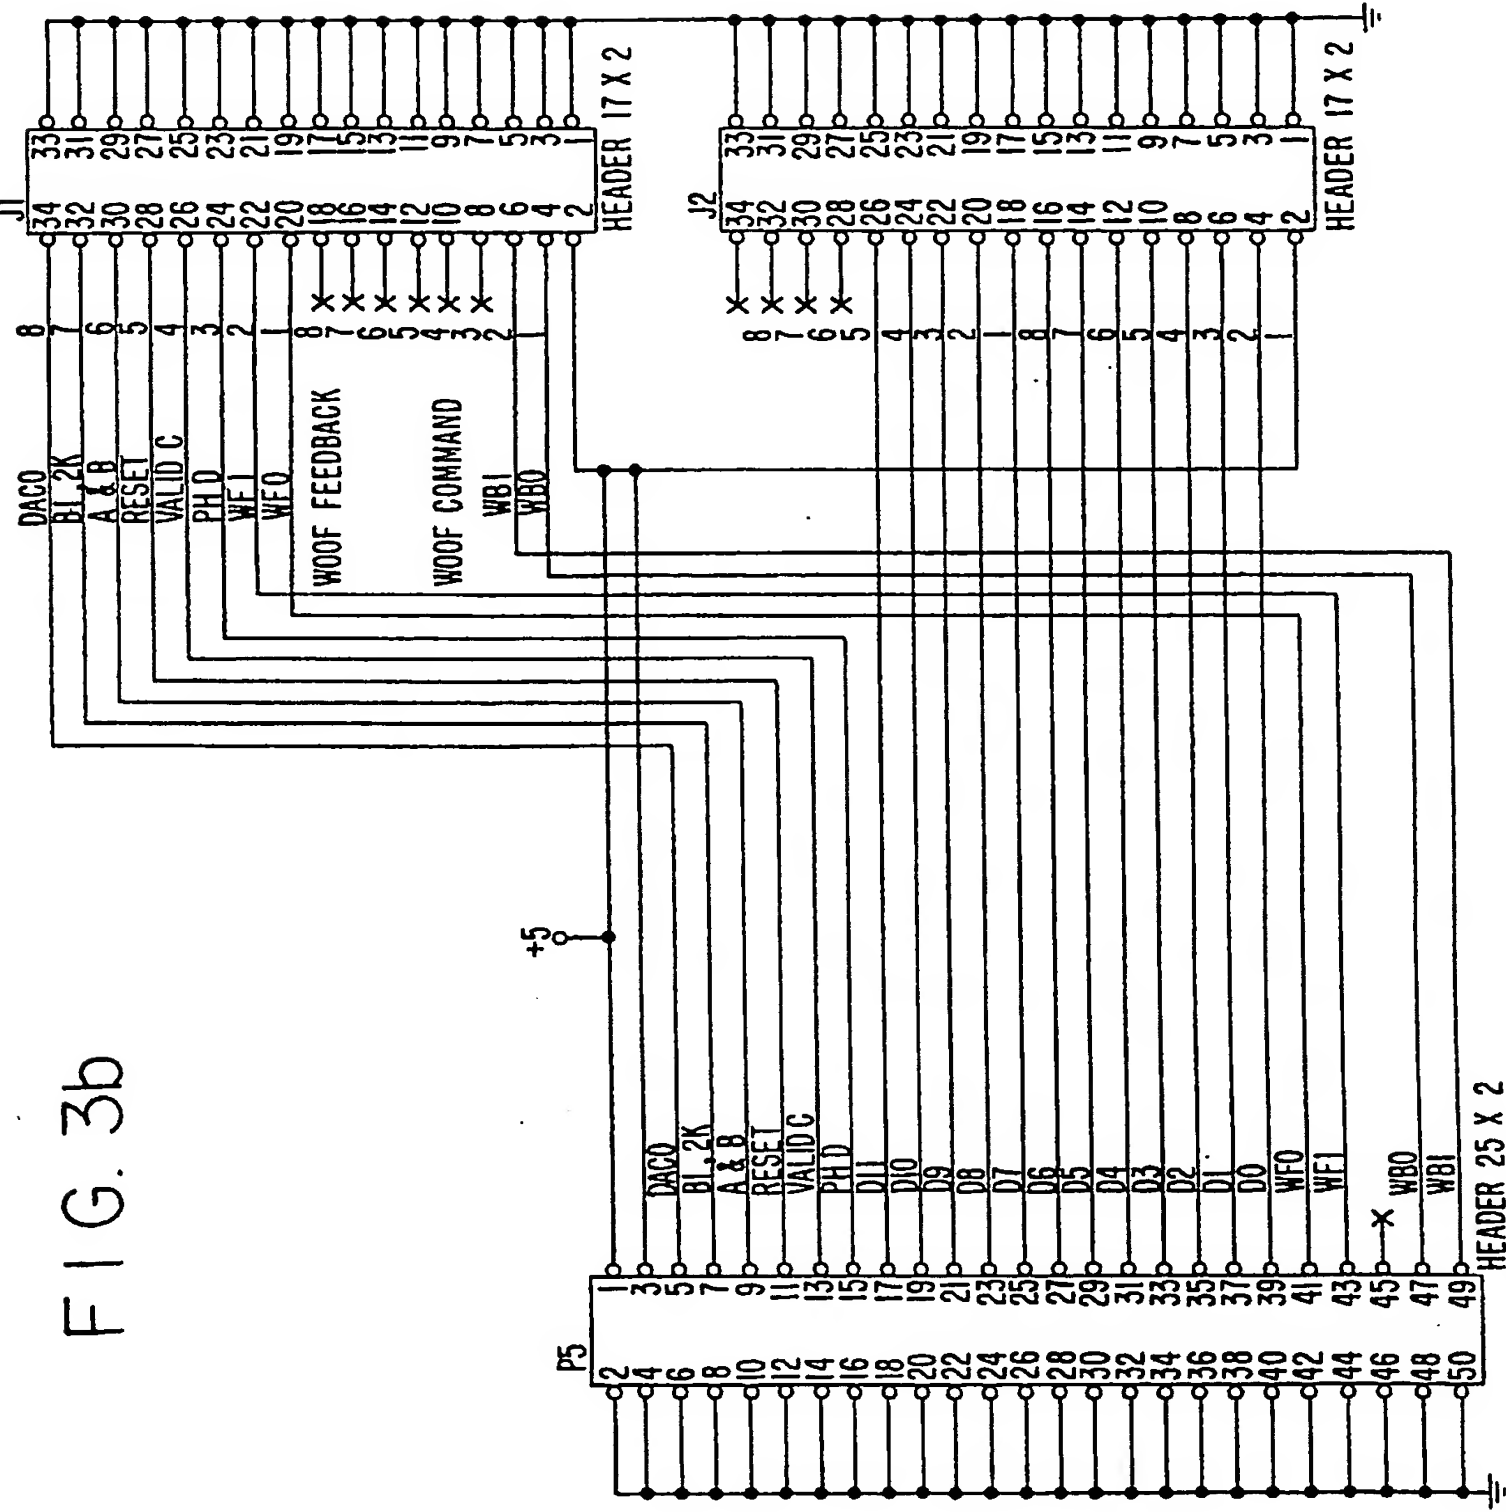
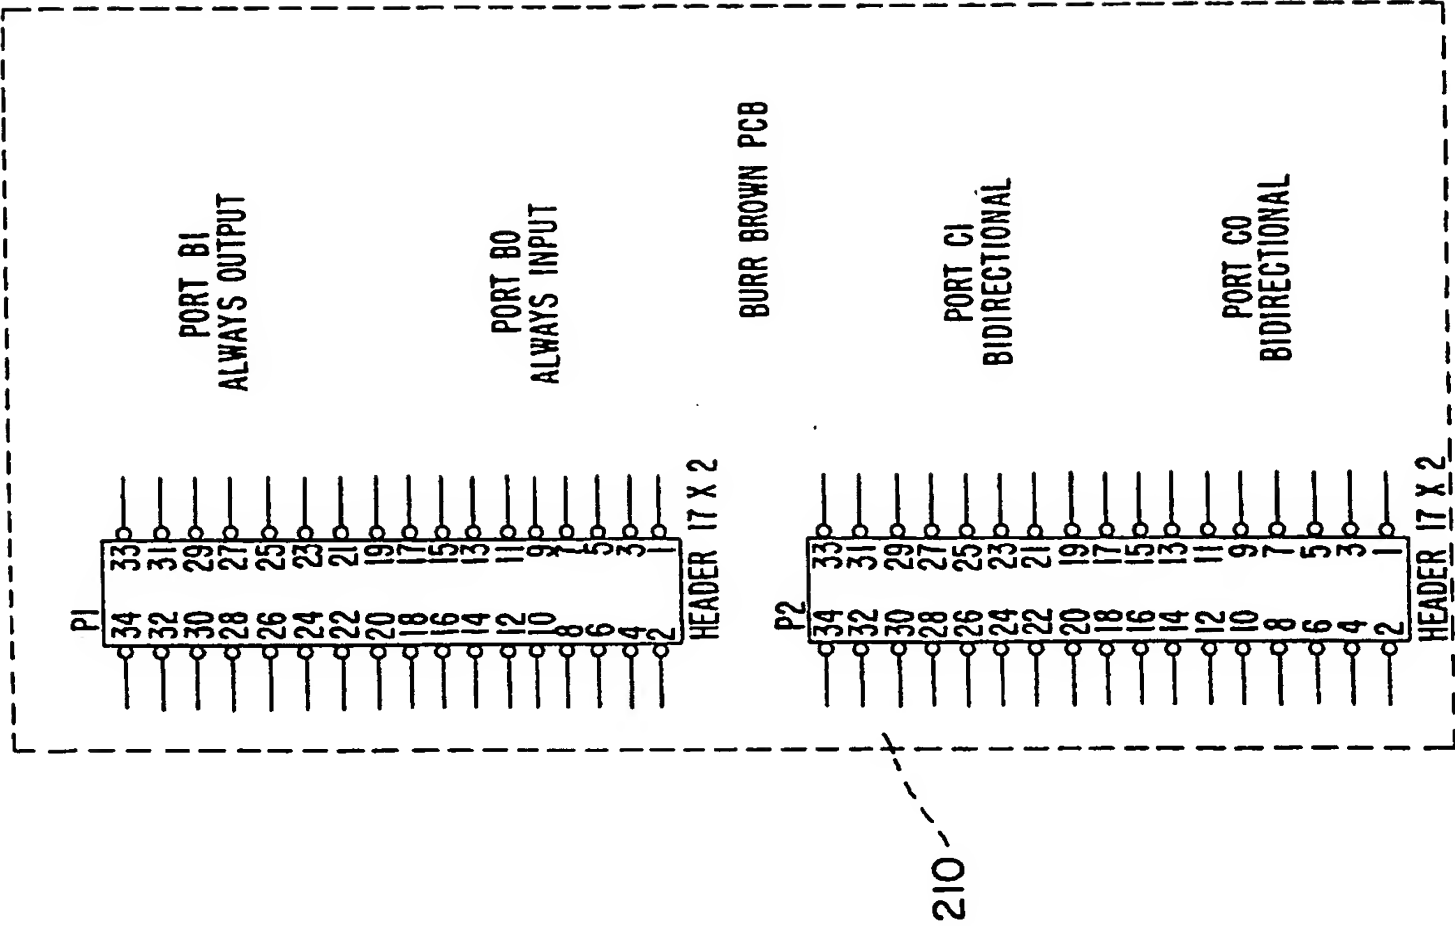


FIG. 3b

205

FIG. 3C



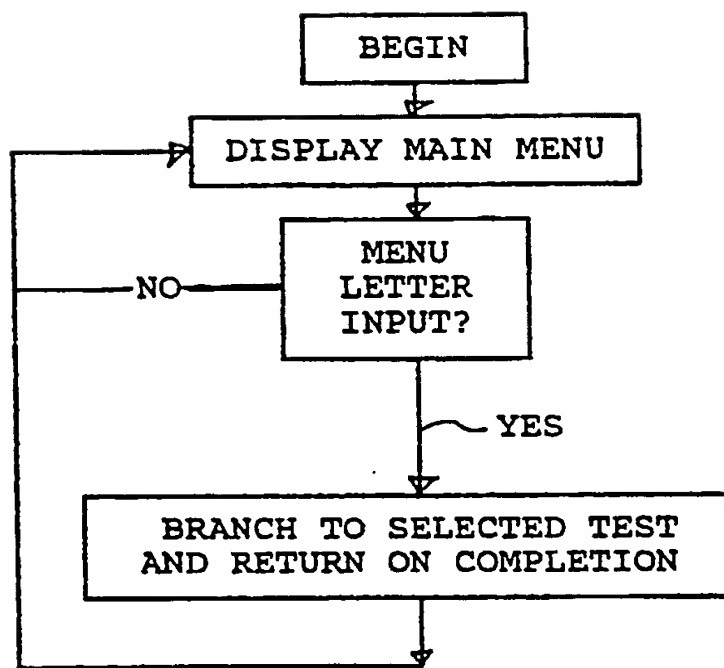


Figure 4a



8 / 2 5

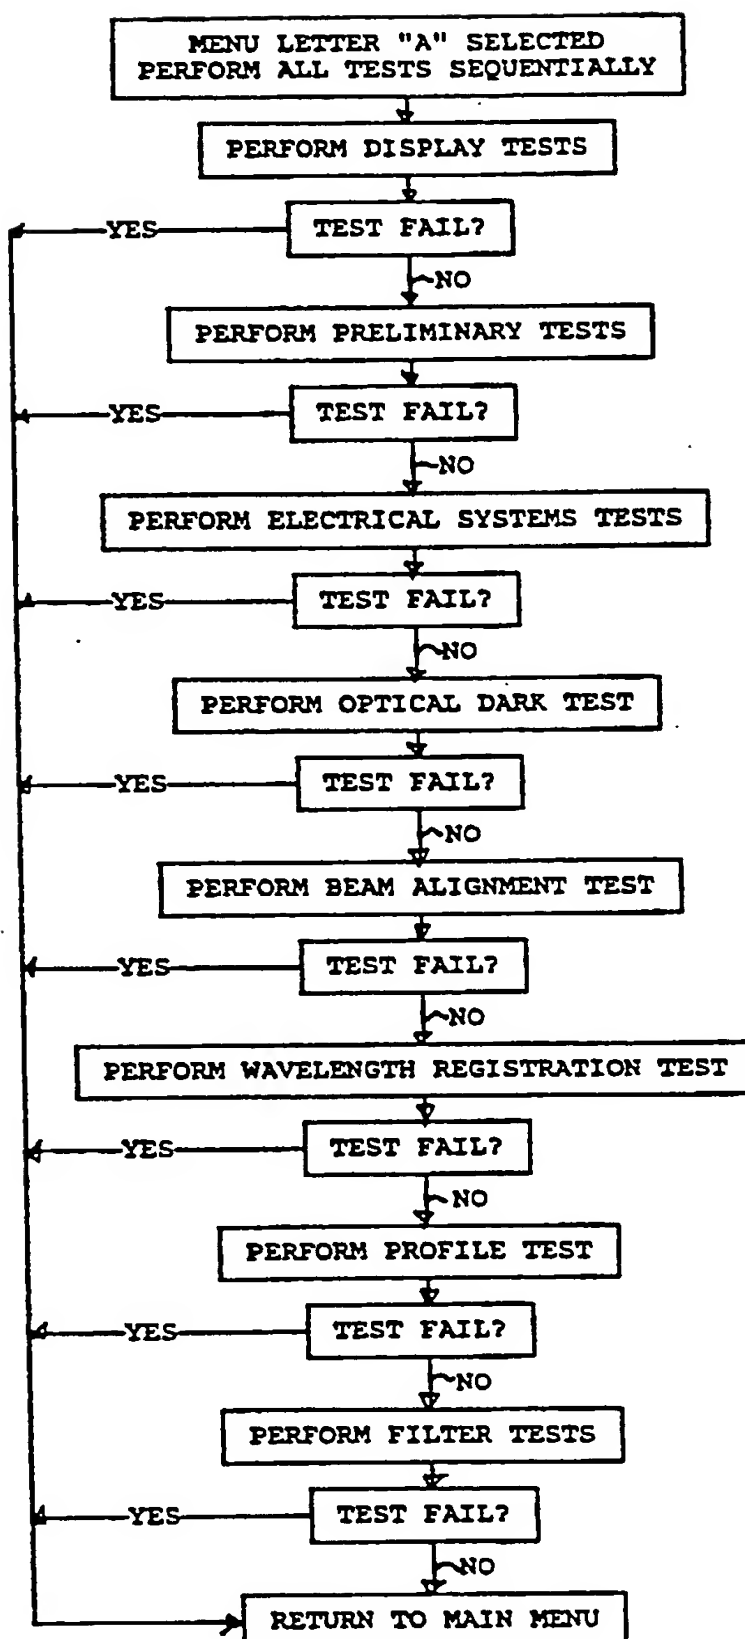


Figure 4b

9 / 2 5

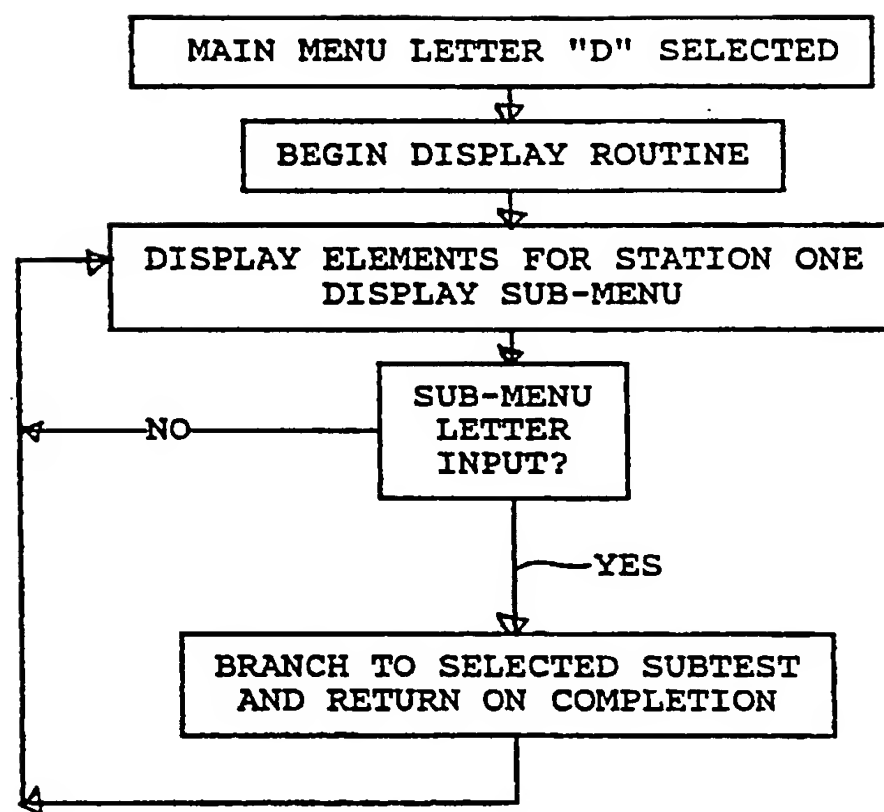


Figure 4c

10 / 25

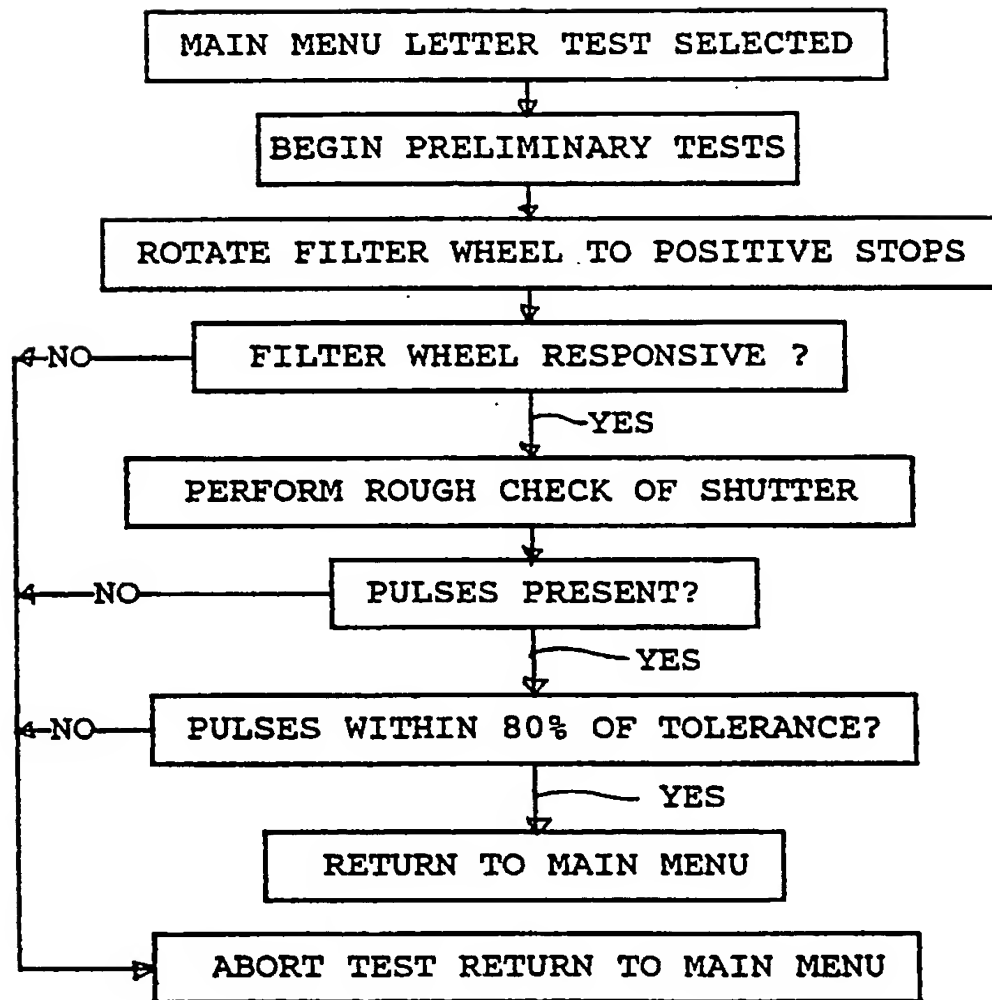


Figure 4d

11 / 25

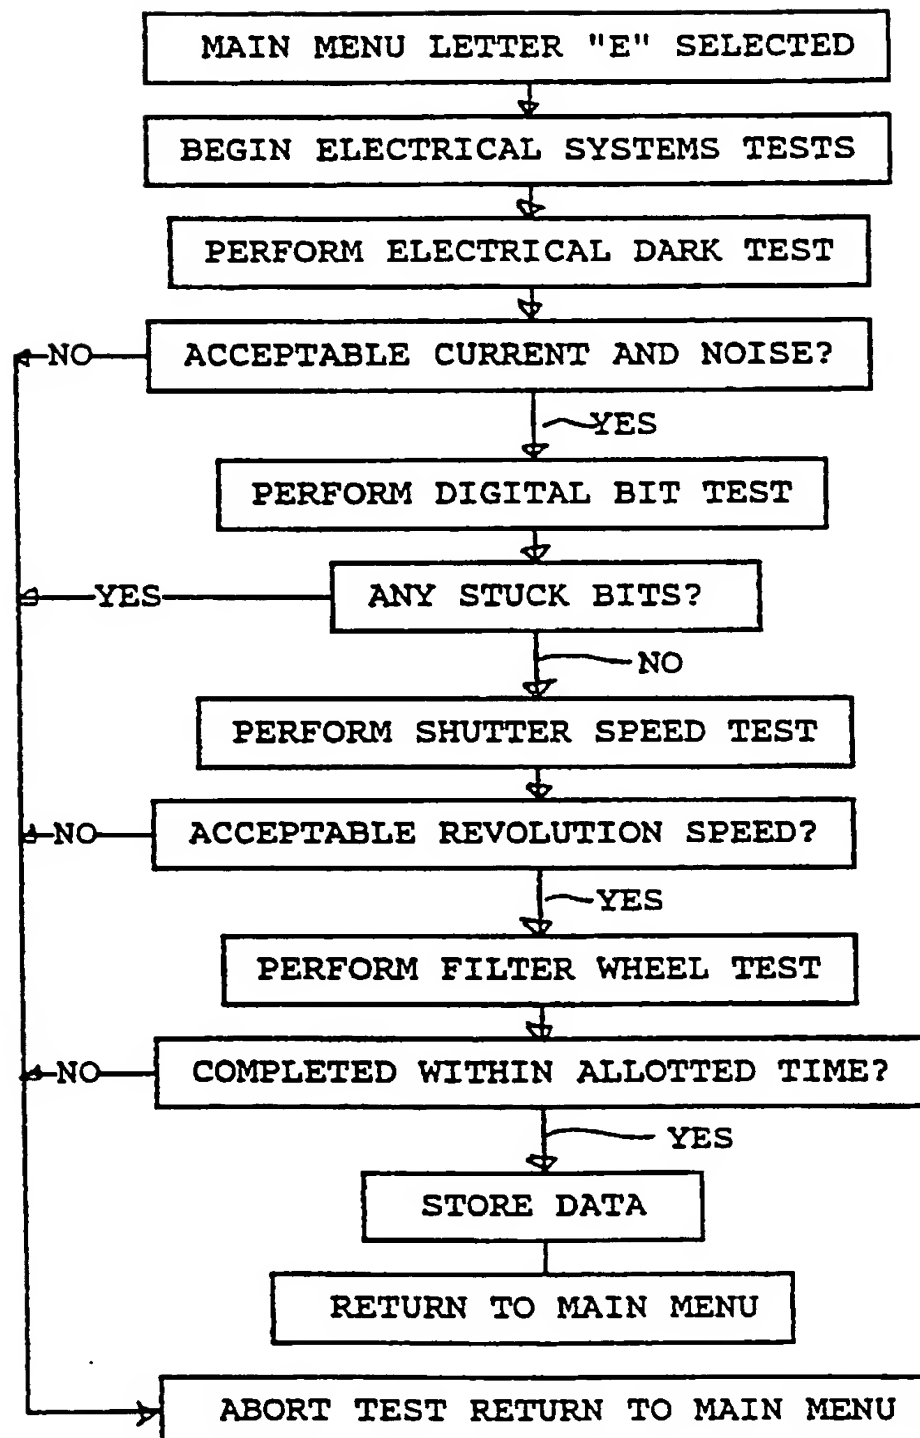


Figure 4e

12 / 2 5

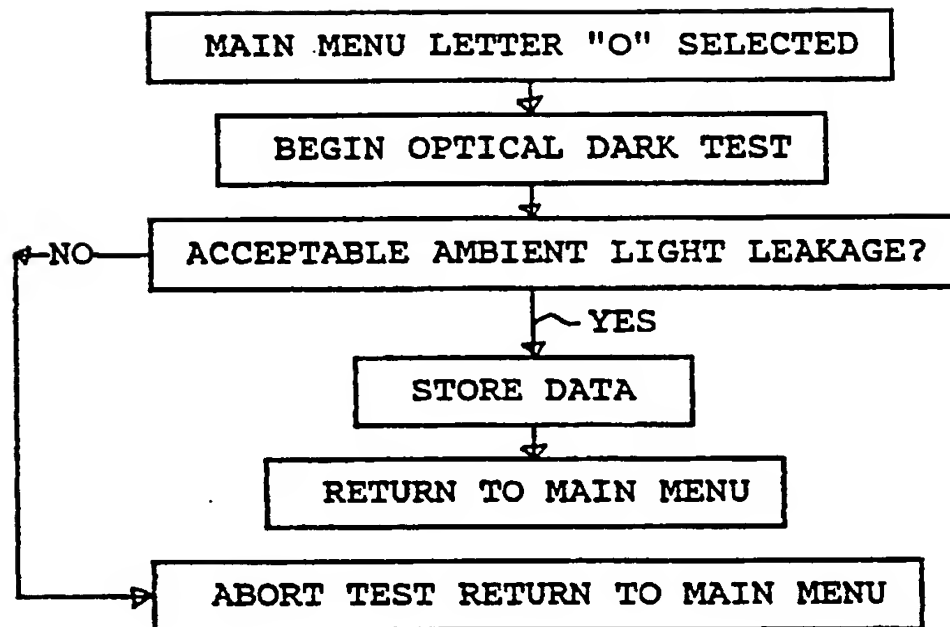


Figure 4f

13 / 25

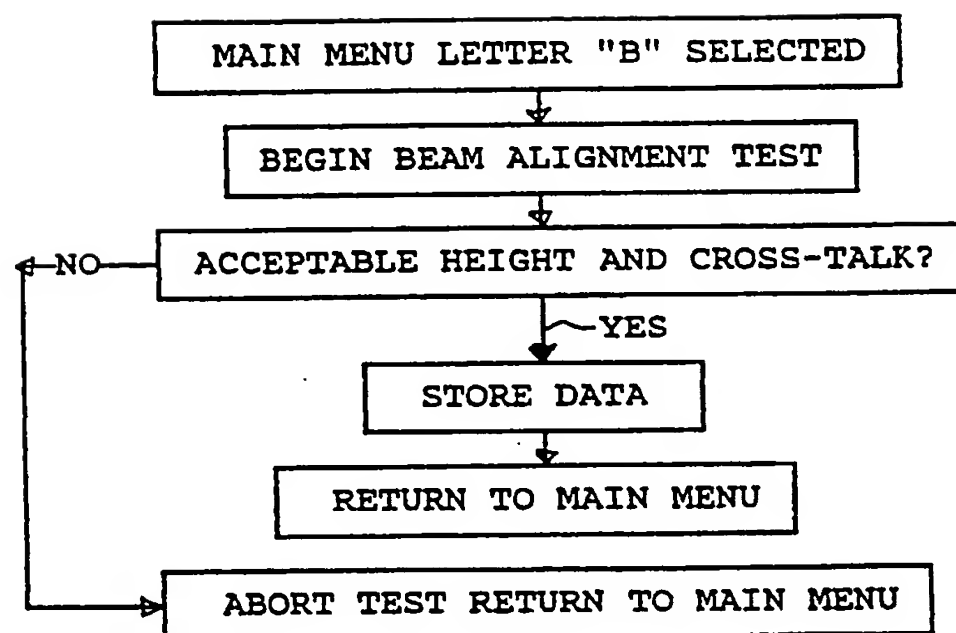


Figure 4g

14 / 25

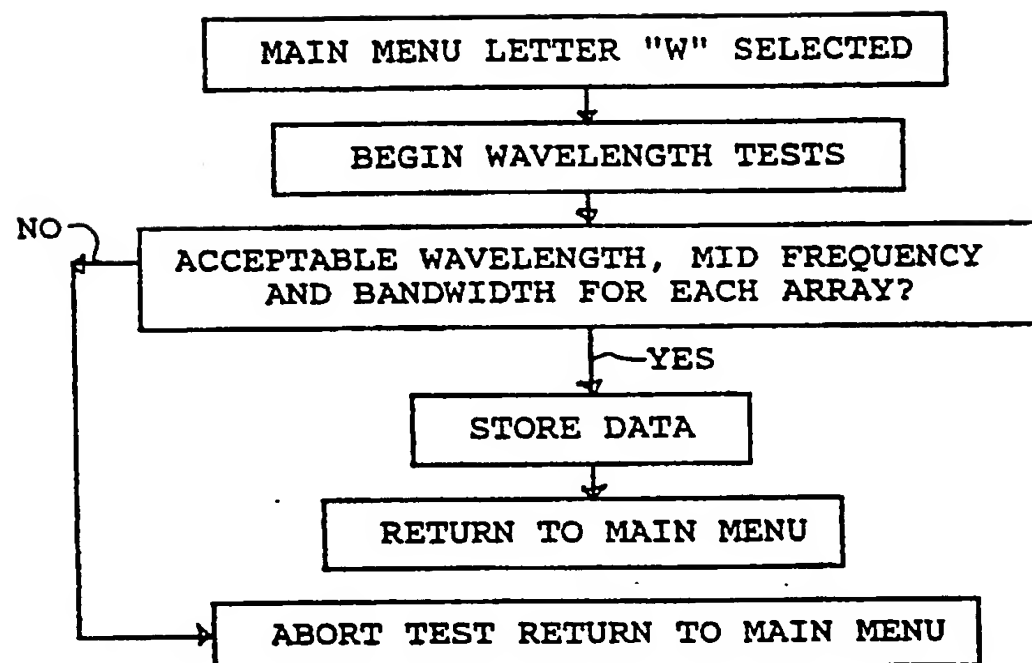


Figure 4h

15 / 25

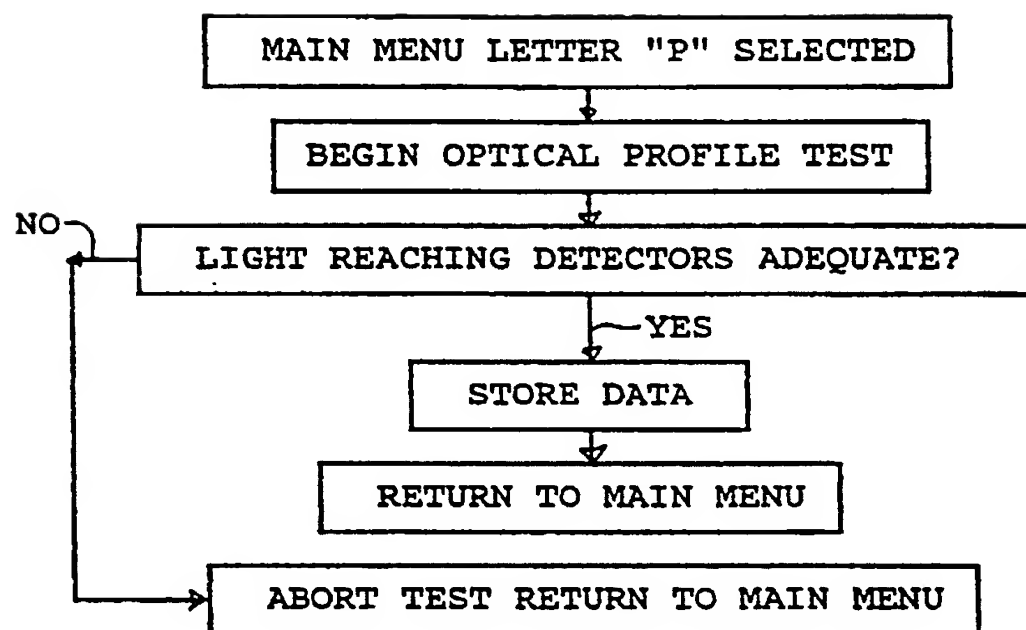


Figure 4i



16 / 25

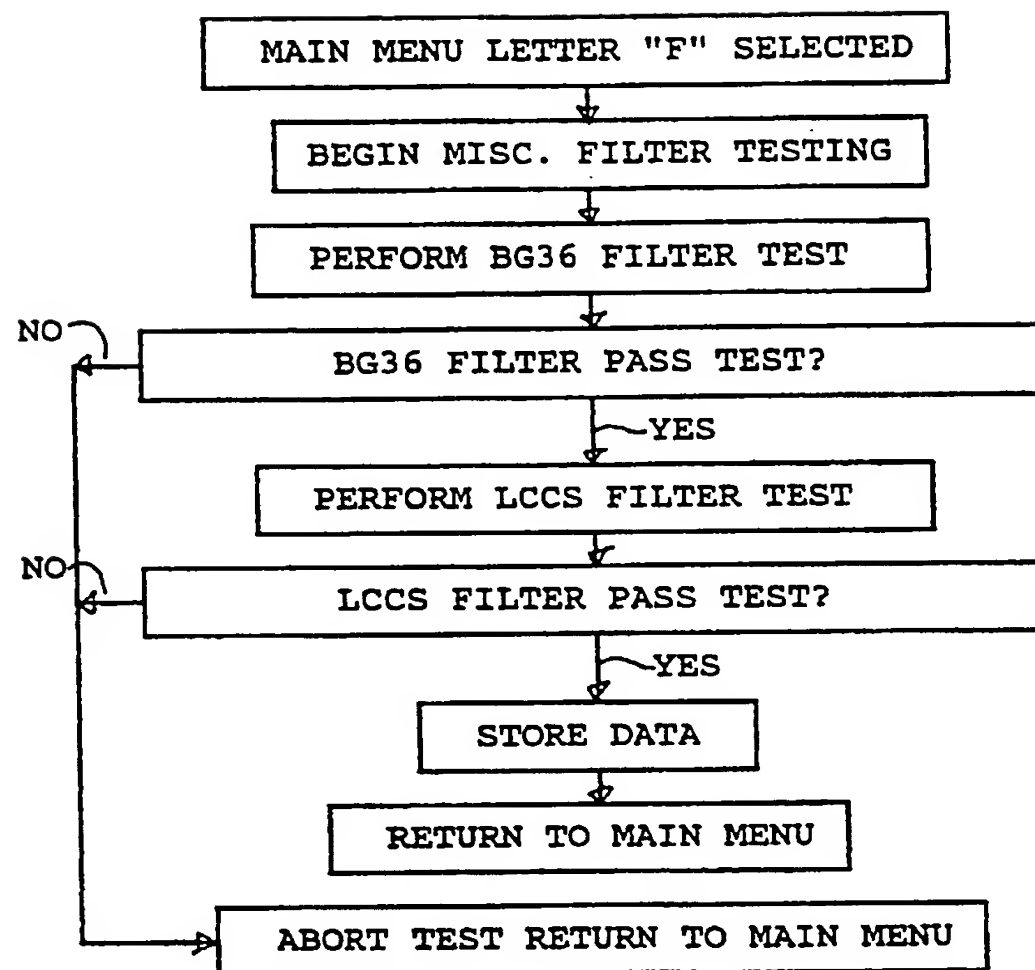


Figure 4j

17 / 25

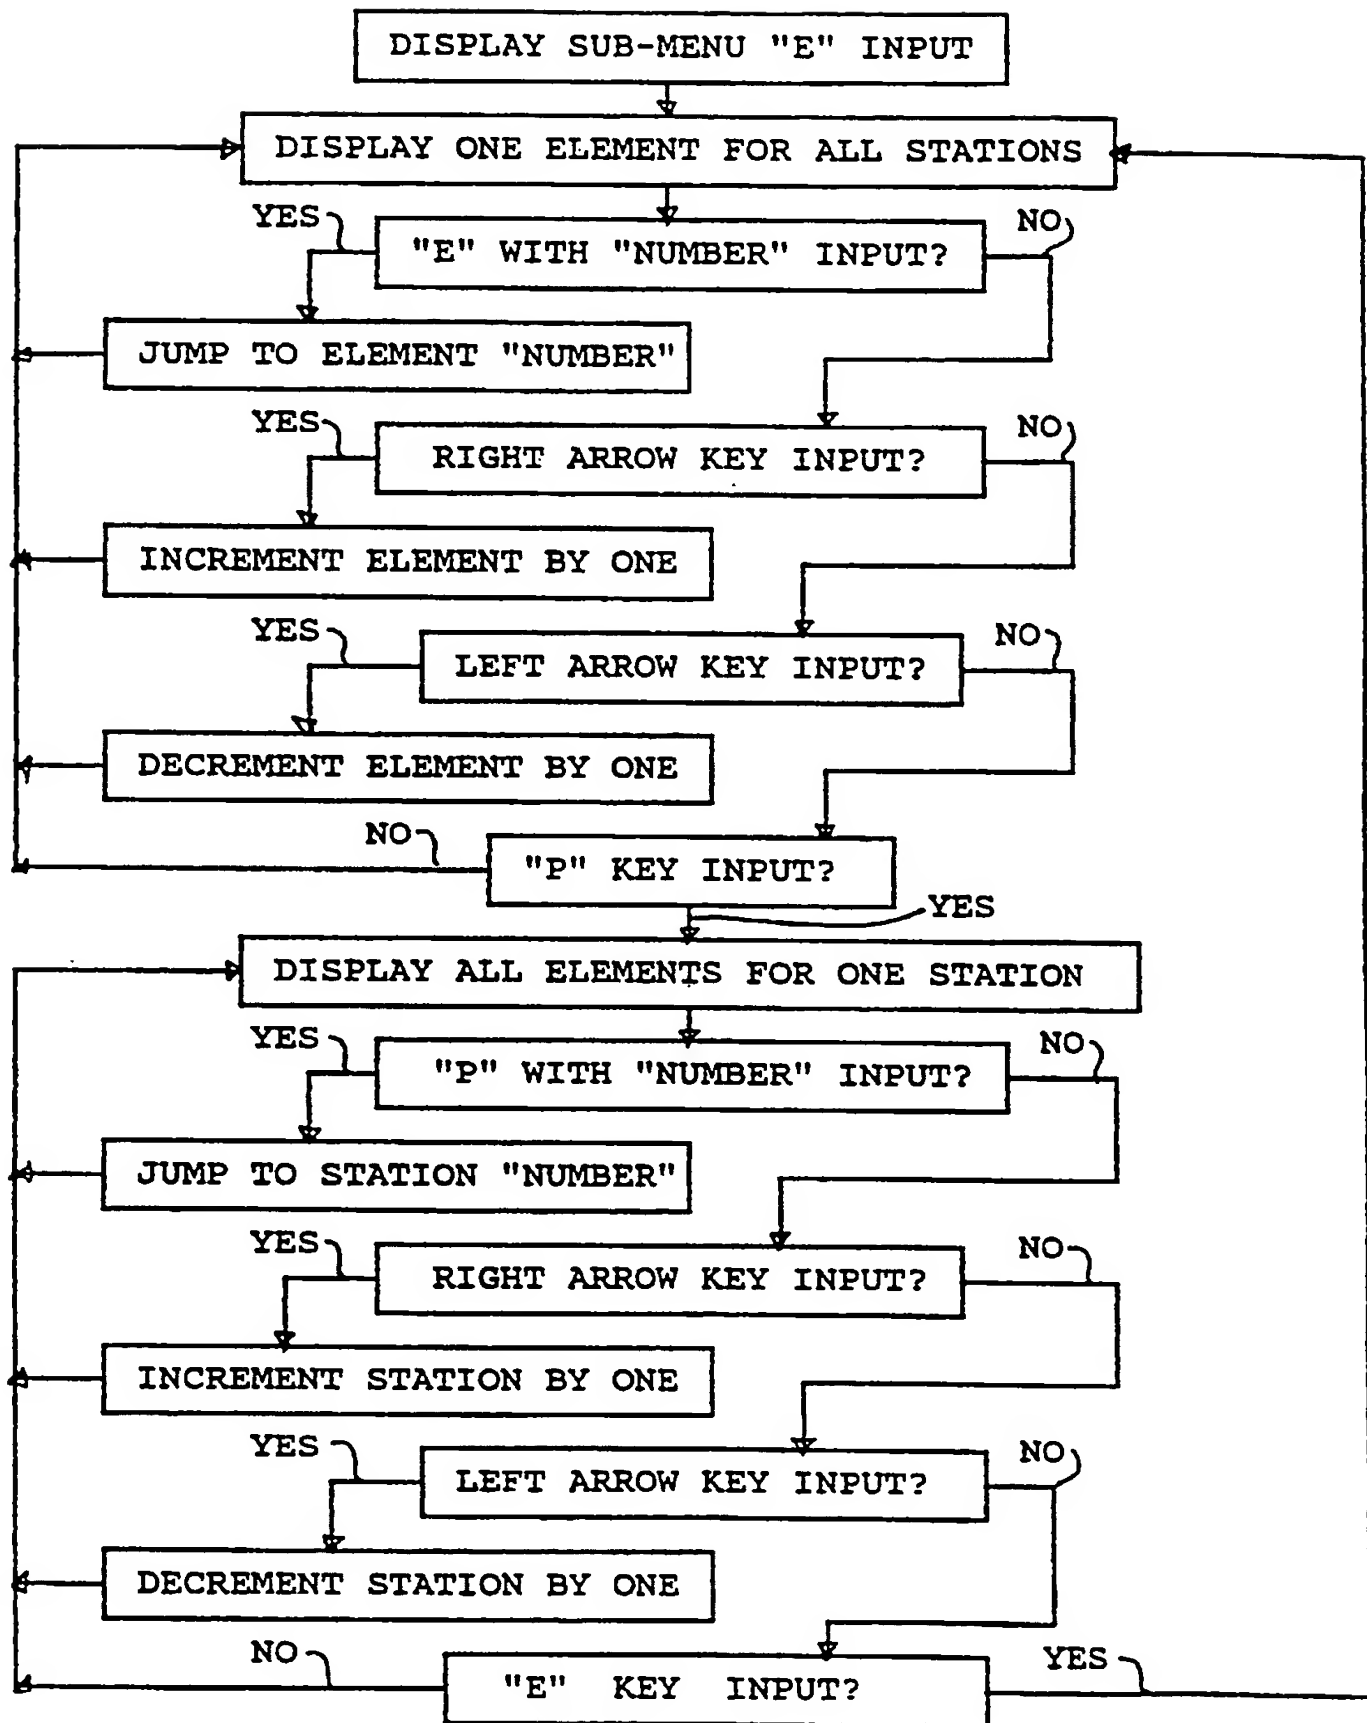


Figure 4k

18 / 25

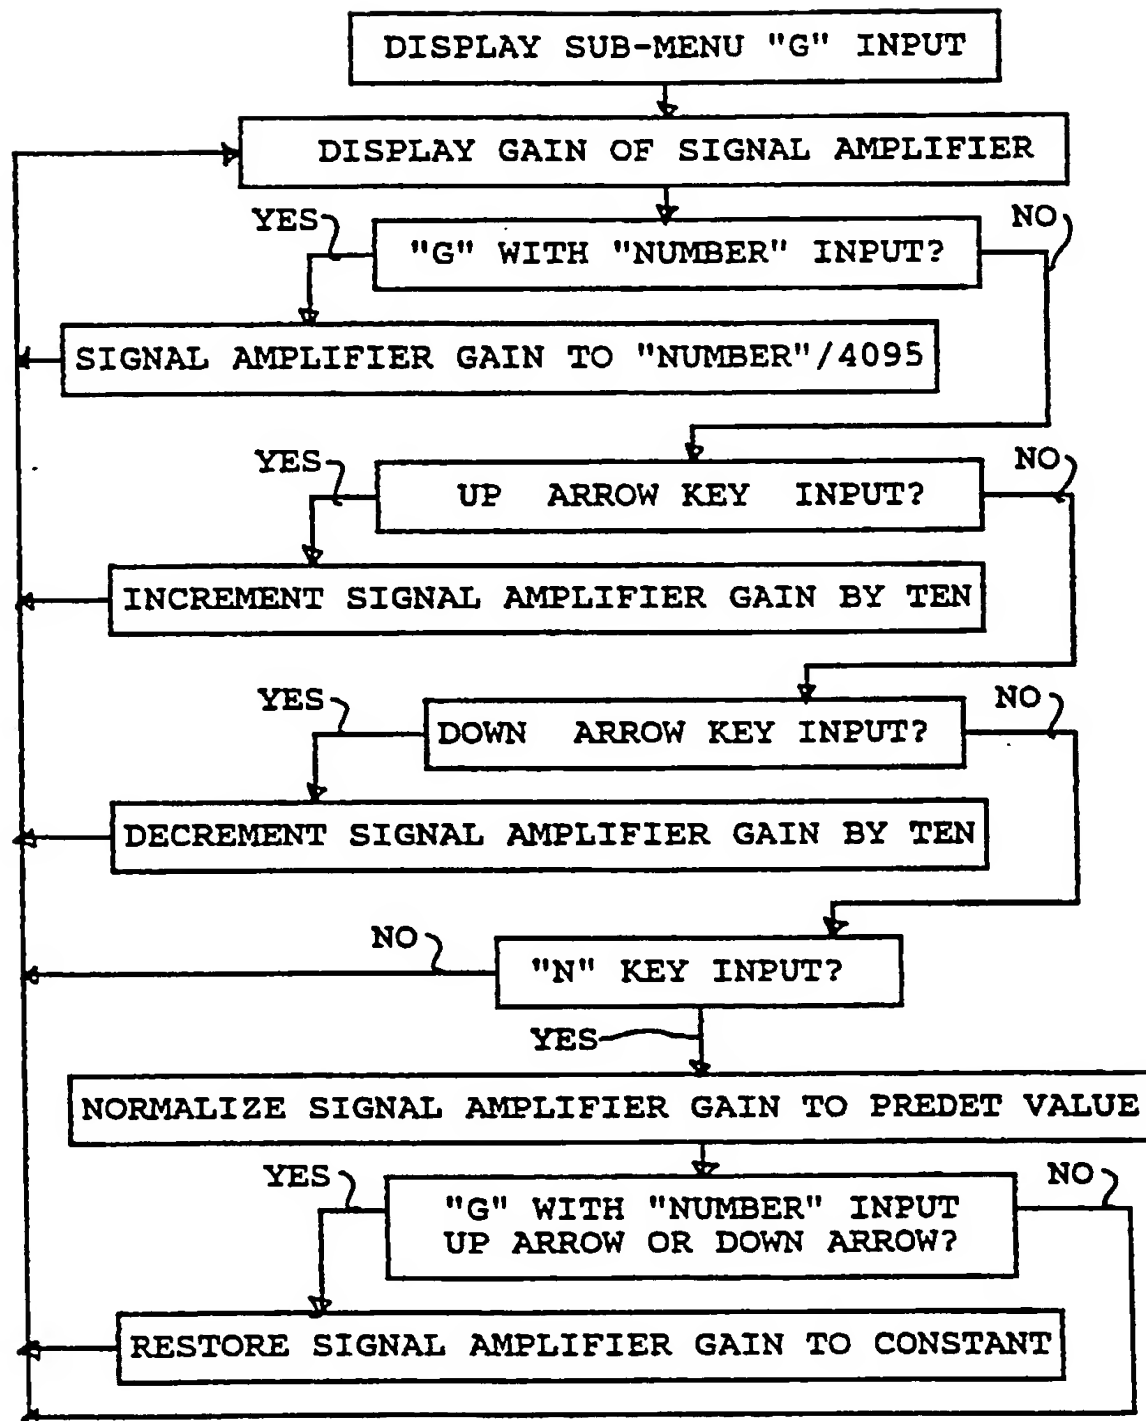


Figure 41

19 / 25

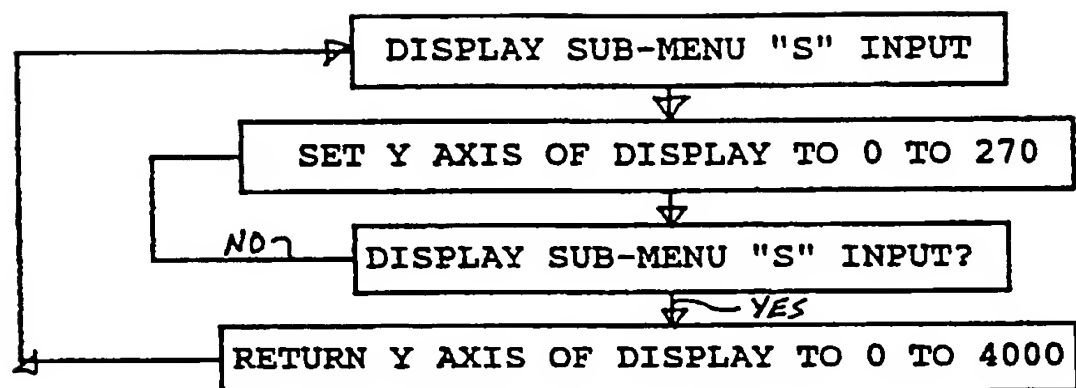


Figure 4m

20 / 2 5

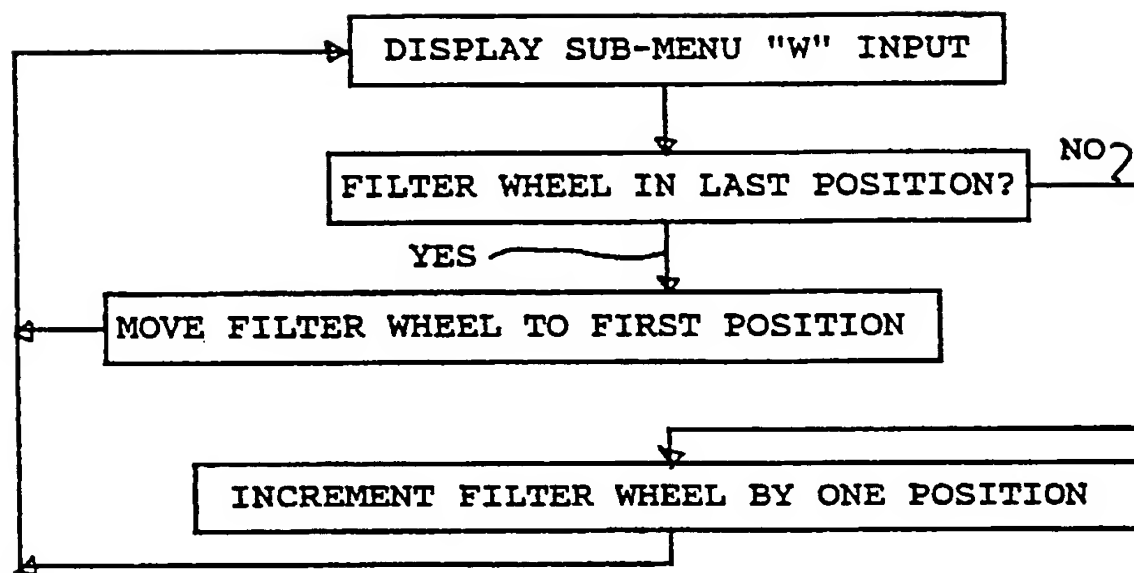


Figure 4n

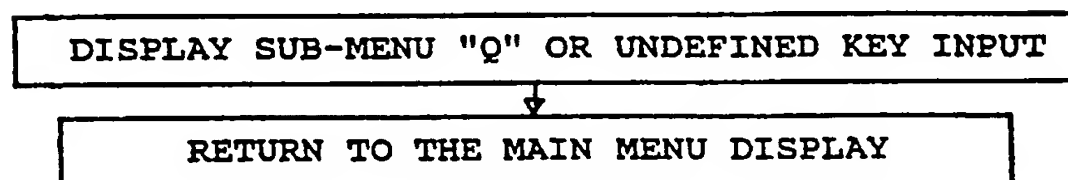


Figure 4o

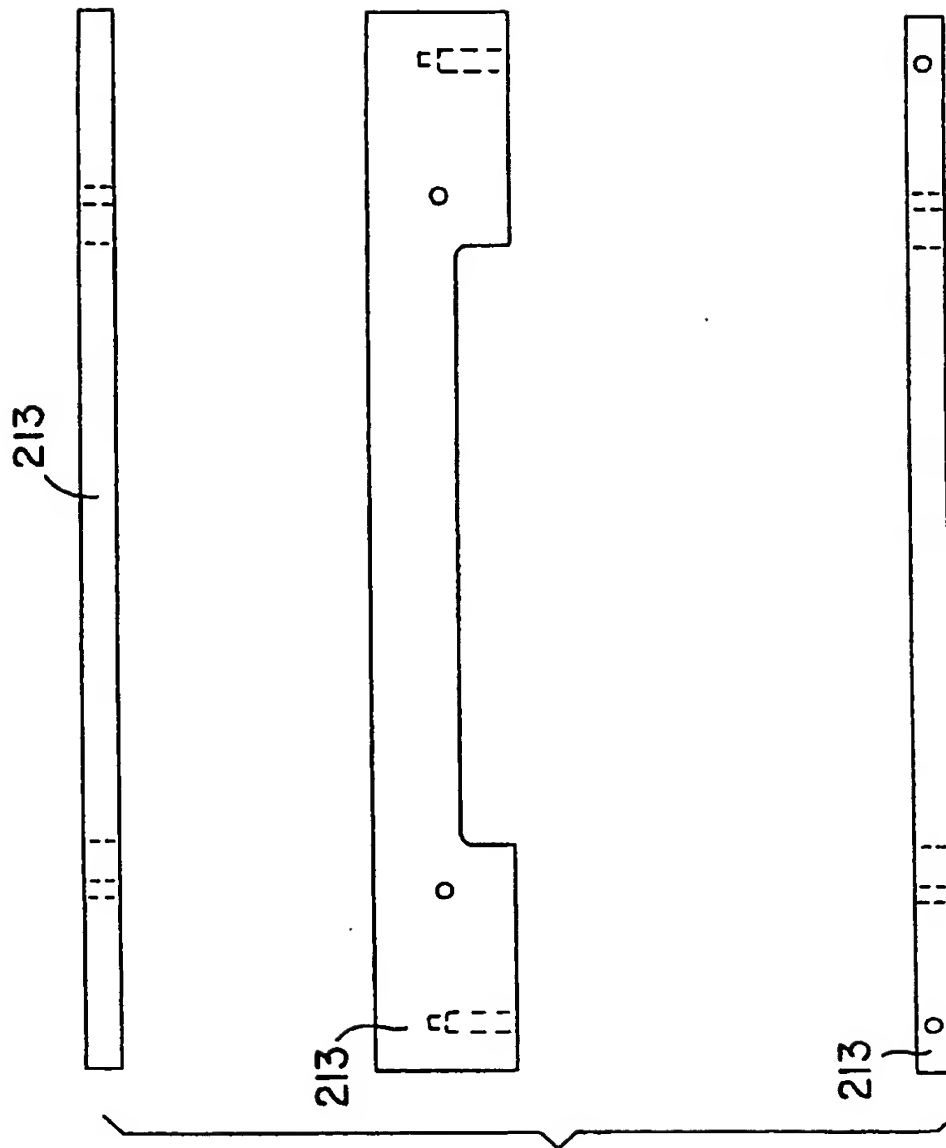


FIG. 5a

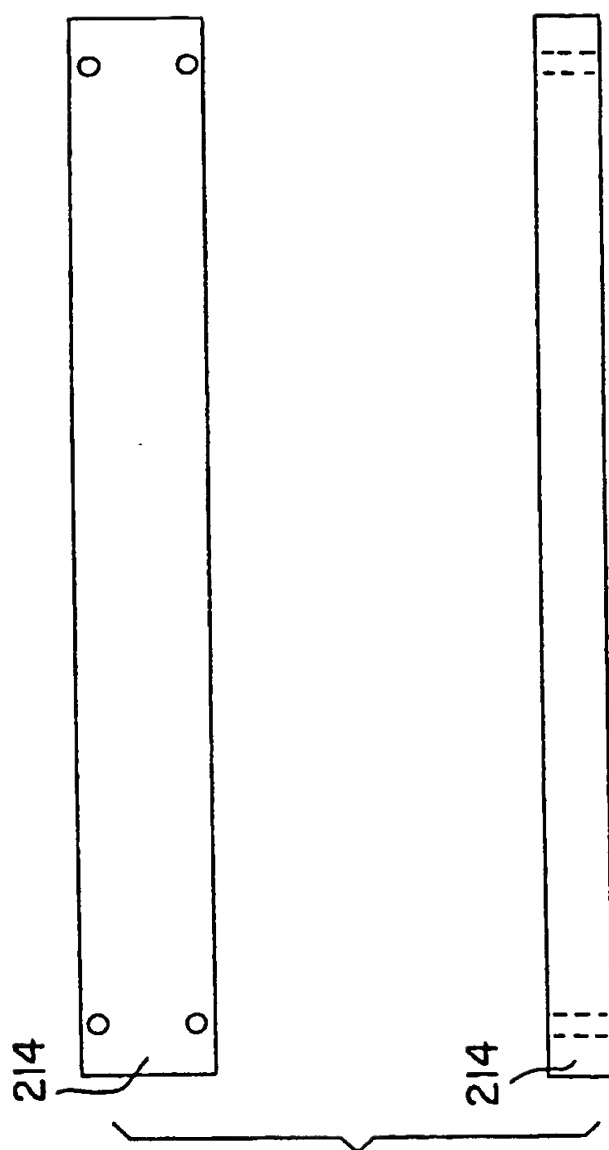


FIG. 5b

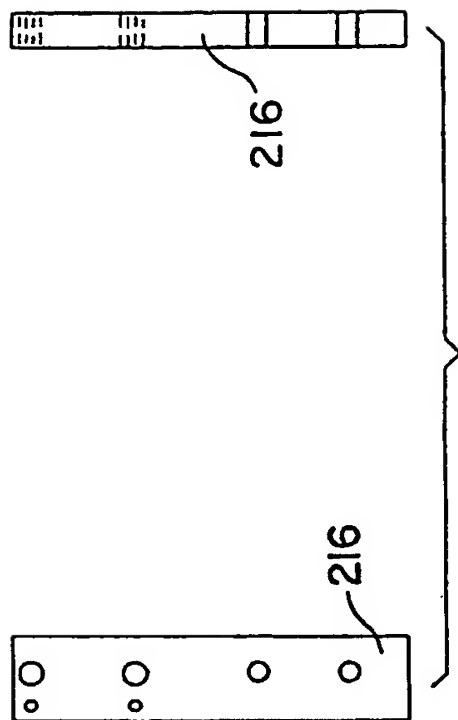


FIG. 5d

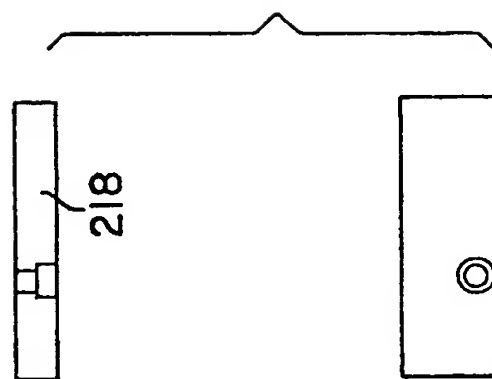


FIG. 5f

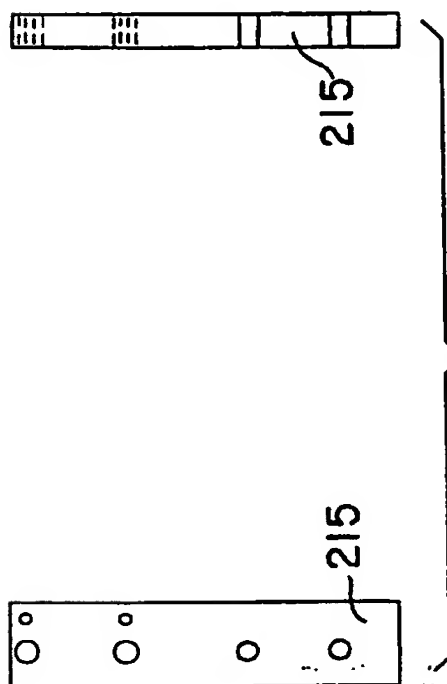


FIG. 5c

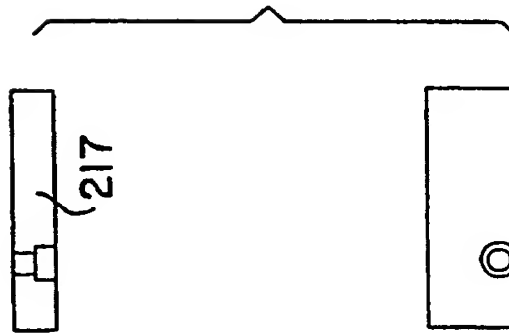


FIG. 5e



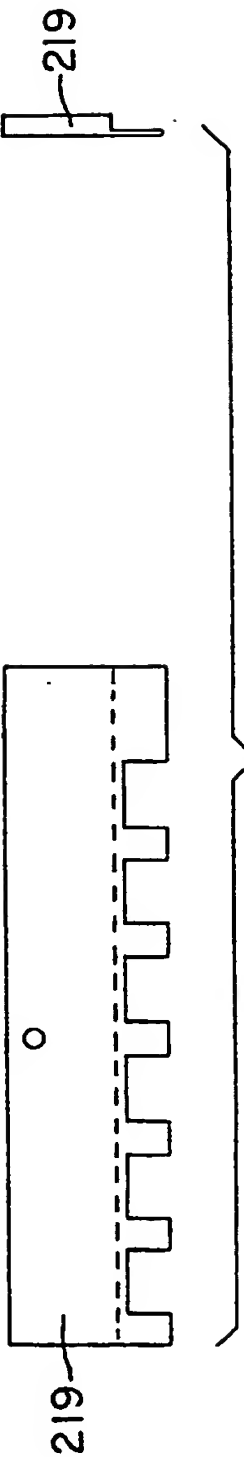


FIG. 5g

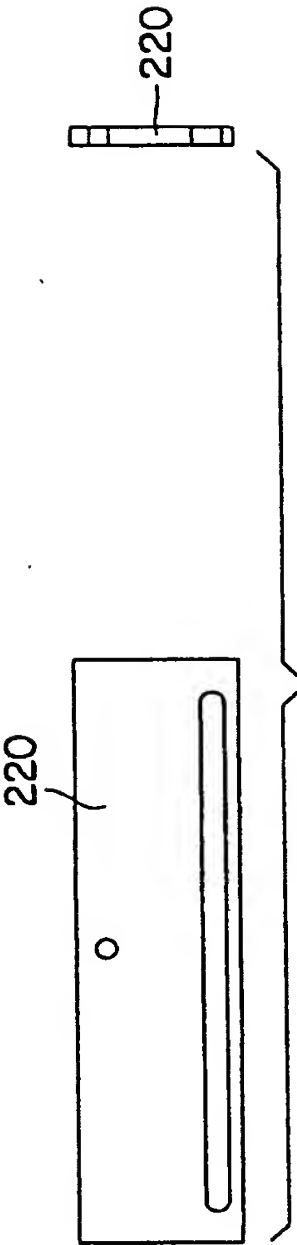


FIG. 5h




FIG. 6b

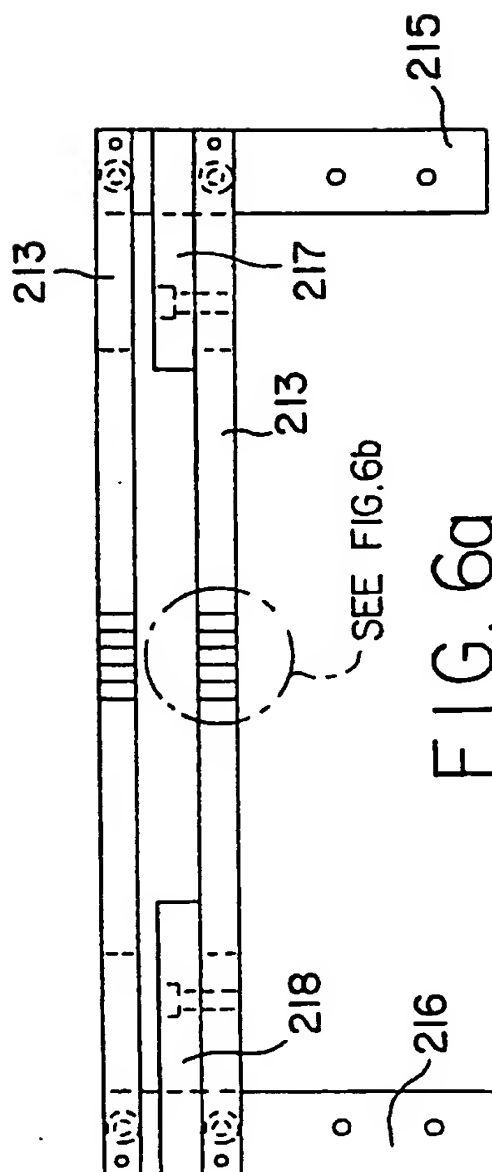


FIG. 6a

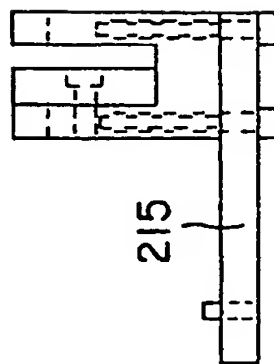


FIG. 6d




FIG. 6f

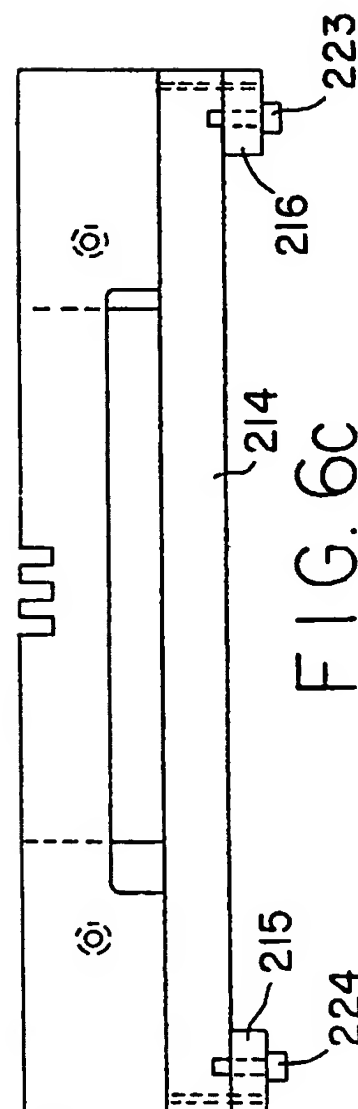


FIG. 6c




FIG. 6e

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US93/10564

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(5) :G01J 3/02  
US CL :356/326

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 356/326, 319, 320, 323, 325, 328; 364/498, 526, 571.02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
Please See Extra Sheet.

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 4,399,502 (MacDonald et al) 16 Aug 1983, Abstract, FIGS. 1 and 2, col. 3, lines 5-8, col. 6, lines 19-34.	1
X	US, A, 5,030,005 (Swope et al) 9 Jul 1991, Abstract, FIG. 1, col. 5, lines 68-69, col. 6, lines 1-3, col. 3, lines 15-28, col. 6, lines 11-15, col. 2, lines 46-55.	30
A	US, A, 5,002,392 (Swope et al) 26 Mar 1991, Abstract, FIG. 1, col. 3, lines 46-68, col. 4, lines 1-64.	1-30
A, P	US, A, 5,245,176 (Haugen) 14 Sep 1993, Abstract, FIG. 1, col. 4, lines 6-17.	1-30



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be part of particular relevance
- \*E\* earlier document published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\*

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\*

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\*

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*G\*

document member of the same patent family

Date of the actual completion of the international search

28 January 1994

Date of mailing of the international search report

FEB 08 1994

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

PETER J. RASHID *Smiller*  
Telephone No. (703) 305-3489

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US93/10564

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,323,309 (Akitomo et al.) 6 Apr 1982, Abstract, FIG. 1, col. 2, lines 15-17, col. 2, lines 50-68, col. 3, lines 1-2, col. 3, lines 4-11, col. 3, lines 63-68, col. 4, lines 1-8, col. 3, lines 19-34, col. 3, lines 11-13.	1-30
Y	US, A, 4,935,875 (Shah et al) 19 Jun 1990, Abstract, FIG. 1, col. 6, lines 42-52, col. 7, lines 28-50, col. 9, lines 62-68, col. 11, lines 28-53.	1-30
Y	US, A, 5,125,748 (Bjornson et al) 30 Jun 1992, Abstract, FIGS. 1 and 2, col. 12, lines 46-61.	1-30
Y	US, A, 4,930,891 (Sato) 5 Jun 1990, Abstract, FIG. 2, col. 3, lines 5- 29.	1-30
Y	US, A, 4,703,437 (Nishimura) 27 Oct 1987, Abstract, FIG. 1, col. 2, lines 57-68, col. 3, lines 8-12.	1-30
Y	US, A, 5,116,122 (Fukuma) 26 May 1992, Abstract, FIG. 1, col. 3 , lines 7-15.	1-30

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US93/10564

### B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

APS

search terms: (spectrometer? or spectrophotometer?) and menu  
test command? and 356/clas  
computer and optic? and test? and command? and display and 356/clas and  
program?  
cuvette? and computer and test? and display and multi-channel  
cuvette? and computer and test? and display and optical?  
cuvette? and multi-channel analyzer

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**